



WIRELESS G ACCESS POINT

SEVEN OPERATION MODES


Can be flexibly configured to operate as an Access Point, AP Client, Bridge, Bridge with AP, Repeater, WISP Client Router or WISP Repeater

TOTAL SECURITY

Complete set of security features including WEP encryption and WPA/WPA2 to protect network against outside intruders

TWO INTEGRATED ETHERNET PORTS

Two Ethernet ports for ready connection to two computers, or to an Ethernet-enabled device (e.g. a broadband router) and a PC

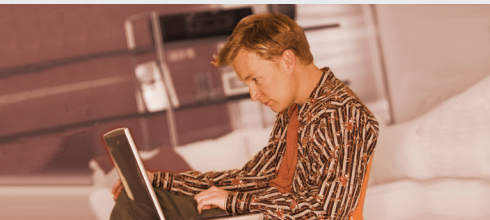

CONNECT HOME AND SOHO TO A WIRELESS NETWORK

Create a wireless network for your home and office using the D-Link DAP-1160 is an 802.11g standard Wireless Access Point. Connect this Access Point to a broadband modem and wirelessly share your Internet connection. Enjoy surfing the web, checking e-mail, and chatting with family and friends online.

PROTECT WIRELESS NETWORK AND DATA

The DAP-1160 provides 64/128-bit WEP encryption and WPA/WPA2 security to protect your network and wireless data. In addition, it also provides MAC address filtering and the Disable SSID Broadcast function to limit outsiders' access to your home and office network.

FLEXIBLY CONFIGURE YOUR AP FOR DIFFERENT APPLICATIONS

The DAP-1160 can be configured to operate as (1) an Access Point to act as a central hub for wireless users, (2) an AP Client to connect to another Access Point, (3) a Bridge to joint two wireless workgroups together, (4) a Bridge with AP to act as wireless hub and a bridge at the same time, (5) a Repeater to extend the wireless coverage to cover all "dead" spots, (6) a WISP Client Router to let wireless Internet service subscribers share Internet connection with home/office Ethernet-enabled computers without the need for an extra router, or (7) a WISP Repeater to let WISP subscribers share Internet connection with wireless computers without any extra router.

EASY TO INSTALL AND USE

With D-Link Setup Wizard, you can set up your wireless network in minutes. It configures your DAP-1160's operation mode, makes it easy to add new wireless devices onto the network, and helps you create a simple wireless network for your home and office.



WHAT THIS PRODUCT DOES

Share your broadband Internet connection with multiple computers in your house by simply connecting wireless computers and devices to this Wireless G Access Point. You can now create your own personal wireless home network to share wireless Internet connection, documents, music, and photos.

VERSATILE FUNCTIONS

The DAP-1160 offers you seven modes of operation, namely Access Point, AP Client, Bridge, Bridge with AP, Wireless Repeater, WISP Client Router and WISP Repeater. This allows you to flexibly configure it for use in different wireless application. In addition, this AP gives you two Ethernet ports for ready computer connection to increase the efficiency of your wireless network.

YOUR NETWORK SETUP

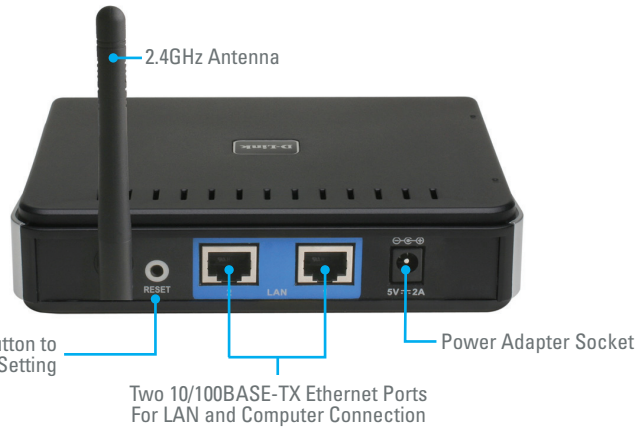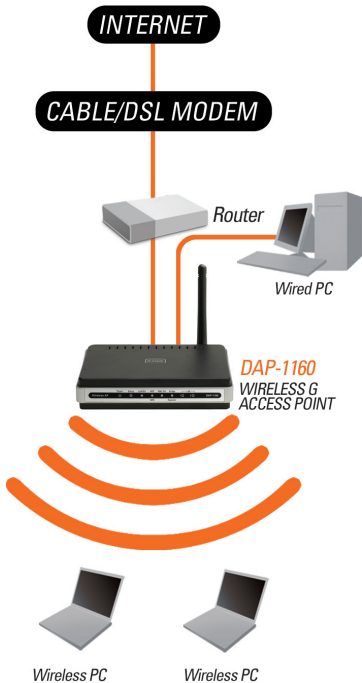

TECHNICAL SPECIFICATIONS

NETWORK STANDARDS

- + 802.11g wireless LAN
- + 802.11b wireless LAN
- + 802.3/802.3u 10BASE-T/100BASE-TX Ethernet
- + ANSI/IEEE 802.3 NWay auto-negotiation

DEVICE INTERFACES

- + 802.11g wireless LAN
- + 2 10/100BASE-TX Ethernet LAN ports

MEMORY

- + 4MB Flash Memory
- + 16MB DRAM

OPERATING FREQUENCY

- + 2.4 to 2.4835 GHz

OPERATING CHANNELS

- + FCC: 11
- + ETSI: 13

RADIO & MODULATION SCHEMES

- + DQPSK, DBPSK, CCK, OFDM

OPERATION MODES

- + Access Point
- + AP Client
- + Bridge
- + Bridge with AP
- + Repeater
- + WISP Client Router
- + WISP Repeater

ANTENNA

- + 2dBi Gain detachable omni-directional antenna with RP-SMA connector

RECEIVE SENSITIVITY

- + For 802.11b, at 8% PER:
 - 11Mbps: -80dBm
 - 5.5Mbps: -84dBm
 - 2Mbps: -87dBm
 - 1Mbps: -88dBm
- + For 802.11g, at 10% PER:
 - 54Mbps: -65dBm
 - 48Mbps: -66dBm
 - 36Mbps: -70dBm
 - 24Mbps: -74dBm
 - 18Mbps: -77dBm
 - 12Mbps: -79dBm
 - 9Mbps: -81dBm
 - 6Mbps: -82dBm

TRANSMIT OUTPUT POWER

- + 16dBm (typical)

SECURITY

- + 64/128-bit WEP data encryption
- + WPA-PSK, WPA2-PSK
- + WPA-EAP, WPA2-EAP
- + TKIP, AES
- + MAC address filtering
- + SSID broadcast disable function

QUALITY OF SERVICE (QOS)

- + Wi-Fi Multimedia (WMM)

DEVICE MANAGEMENT

- + Web-based management through Internet Explorer v.6 or later, Netscape Navigator v.6 or later or other Java-enabled browser

DIAGNOSTIC LED

- + Power
- + Status

- + Link/Act
- + WEP/WPA
- + MAC Ctrl
- + BRIDGE / REPEATER
- + LAN1
- + LAN2

POWER INPUT

- + 5VDC 2A
- + External power adapter

DIMENSIONS

- + 144 (W) x 109 (D) x 30 (H) mm
- (5.67 x 4.29 x 1.18 inches)

WEIGHT

- + 229grams (0.5 lb)

OPERATING TEMPERATURE

- + 0° to 55° C (32° to 131° F)

STORAGE TEMPERATURE

- + -10° to 70° C (14° to 158° F)

OPERATING HUMIDITY

- + 10% to 90% non-condensing

STORAGE HUMIDITY

- + 5% to 95% non-condensing

CERTIFICATION

- + FCC Class B
- + CE
- + C-Tick
- + Wi-Fi


54Mbps maximum wireless signal rate derived from IEEE standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, may lower actual throughput rate. Environmental factors will adversely affect wireless signal range, maximum throughput based on 802.11g devices.



D-Link Worldwide Offices


U.S.A.	TEL: 1-800-326-1688	FAX: 1-866-743-4905	Portugal	TEL: 351-21-8688493	Pakistan	TEL: 92-21-454 8158	FAX: 92-21-453 5103
Canada	TEL: 1-905-8295033	FAX: 1-905-8295223	Czech Republic	TEL: 420-(603)-276-589	Egypt	TEL: 202-291-9035	FAX: 202-291-9051
Europe (U. K.)	TEL: 44-20-8955-9000	FAX: 44-20-8955-9001	Switzerland	TEL: 41-(0)-1-832-11-00	Israel	TEL: 972-9-9715700	FAX: 972-9-9715601
Germany	TEL: 49-6196-77990	FAX: 49-6196-7799300	Greece	TEL: 30-210-9914 512	LatinAmerica	TEL: 56-2-5838-950	FAX: 56-2-5838-952
France	TEL: 33-1-30238688	FAX: 33-1-30238689	Luxembourg	TEL: 32-(0)2-517-7111	Brazil	TEL: 55-11-218-53300	FAX: 55-11-218-53322
Netherlands	TEL: 31-10-282-1445	FAX: 31-10-282-1331	Poland	TEL: 48-(0)-22-583-92-75	South Africa	TEL: 27-12-665-2165	FAX: 27-12-665-2186
Belgium	TEL: 32(0)2-517-7111	FAX: 32(0)2-517-6500	Hungary	TEL: 36-(0)-1-461-30-00	Russia	TEL: 7-495-744-0099	FAX: 7-495-744-0099 #350
Italy	TEL: 39-02-2900-0676	FAX: 39-02-2900-1723	Singapore	TEL: 65-6774-6233	Japan	TEL: 81-3-5781-0963	FAX: 81-3-5781-0965
Sweden	TEL: 46-1018564-61900	FAX: 46-1018564-61901	Australia	TEL: 61-2-8899-1800	China	TEL: 86-10-58635800	FAX: 86-10-58635799
Denmark	TEL: 45-43-969040	FAX: 45-43-424347	India	TEL: 91-022-26526696	Taiwan	TEL: 886-2-6600-0123	FAX: 886-2-6600-8168
Norway	TEL: 47-99-300-100	FAX: 47-22-309580	Middle East (Dubai)	TEL: 971-4-3916480	Headquarters	TEL: 886-2-6600-0123	FAX: 886-2-6600-9898
Finland	TEL: 358-10-309 8840	FAX: 358-9-2707-5081	Turkey	TEL: 0212-289-5659			
Spain	TEL: 34-93-4090770	FAX: 34-93-4910795	Iran	TEL: 9821-8882-2613			

Access Point Mode

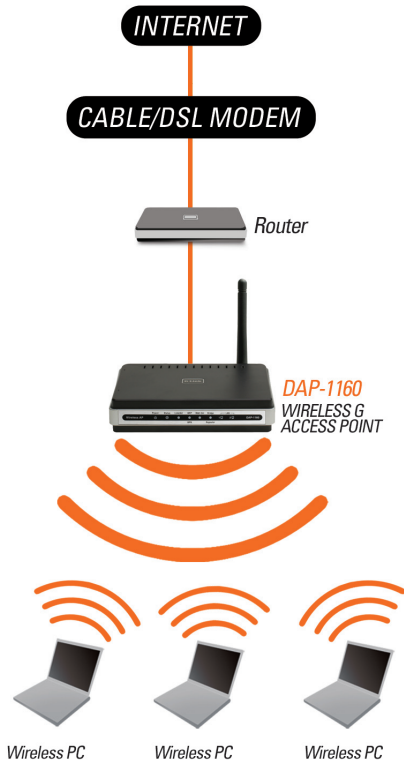


Wireless PCs Using the DAP-1160 as a Central Connection Point

AP Client Mode

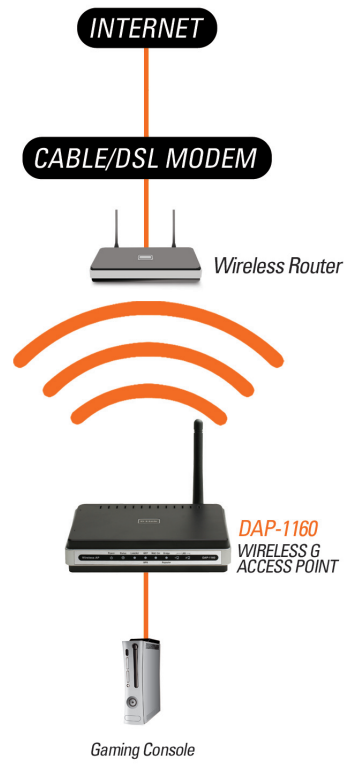


Ethernet-enabled Gaming Console Using the DAP-1160 as a Wireless Interface to Access the Internet

Bridge Mode

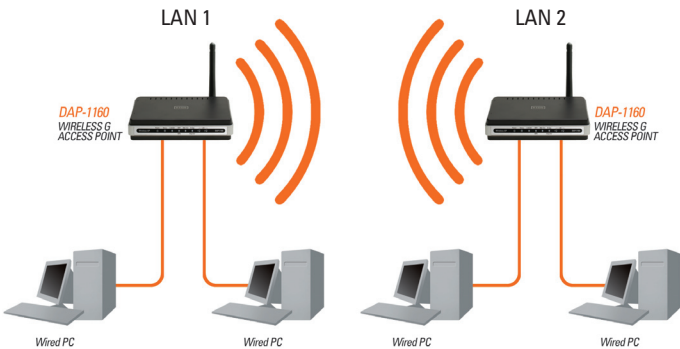

Connecting Two Separate LANs Together Through Two DAP-1160 Units (Wireless PCs Cannot Access the DAP-1160 Units)

Bridge with AP Mode

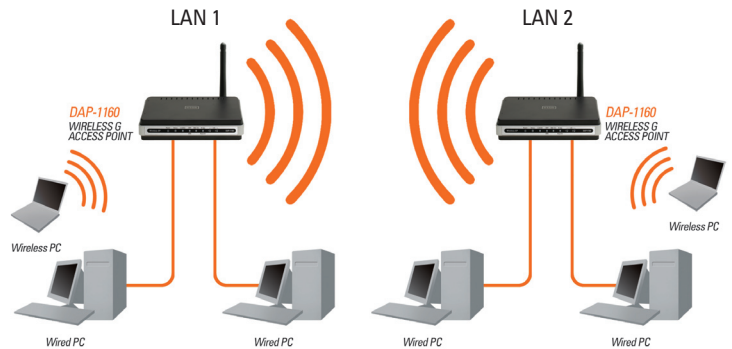


Connecting Two Separate LANs Together Through Two DAP-1160 Units (Wireless PCs Can Access the DAP-1160 Units)

Repeater Mode




Extending the Wireless Coverage of a Wireless Router Using the DAP-1160

WISP (Wireless Internet Service Provider) Client Router Mode

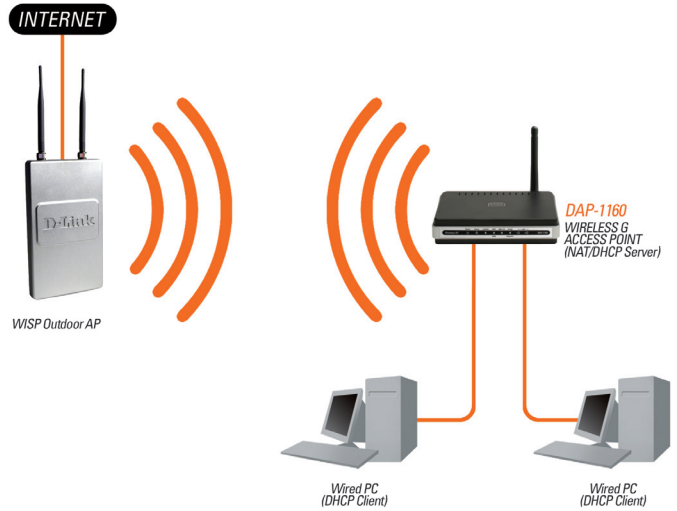

Connecting Wired PCs to the Internet Using the DAP-1160

WISP (Wireless Internet Service Provider) Repeater Mode

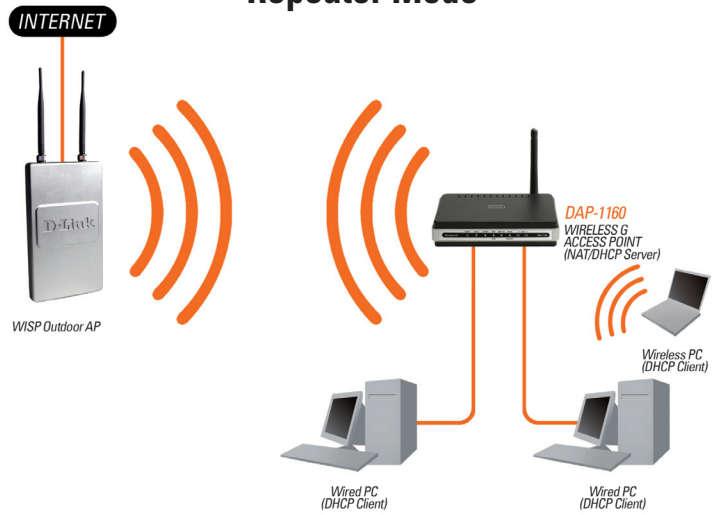

Connecting Wired and Wireless PCs to the Internet Using the DAP-1160