

D-Link Quick Installation Guide

DCS-2100

SECURICAM Network
10/100 Fast Ethernet
Audio Internet Camera

This product can be set up using Internet Explorer 6.x or above



Before You Begin

You must have at least the following:

- Windows 98/Me/2000/XP
- A CD-ROM drive
- An available Ethernet connection

Check Your Package Contents

These are the items included with your purchase:

If any of the below items are missing, please contact your reseller.



DCS-2100 Internet Camera with Stand



CD-ROM with Manual and Installation Wizard



CAT5 Ethernet Cable



5V AC Power Adapter



Using a power supply with a different voltage rating will damage this product and void the warranty.

System Requirements

- Internet Explorer 6.x or above
- CPU: 800MHz or above
- Memory Size: 128MB (256MB recommended)
- VGA card resolution: 800x600 or above

Note: If using multiple cameras for viewing/recording, the minimum requirements are a 2GHz or above CPU with 512MB memory and a 32MB video card.

1

Hardware Installation

Connect the Ethernet Cable

Connect an Ethernet cable to the Ethernet connector located on the Internet Camera's bottom panel and attach it to the network.



If you connect this camera directly to a PC, you will need a cross-over Ethernet cable. If you connect the camera into a hub or router, you will be able to use the cable included with your camera.

Attach the External Power Supply

Attach the external power supply to the DC power input connector located on the Internet Camera's bottom panel (labeled DC 5V 2A) and connect it to an AC power outlet.




Power source is confirmed when the LED Power Indicator on the Internet Camera is illuminated.

The LED will flash blue and red when you first power on the unit. The LED will not turn blue until the camera is configured.


2

Installing the Installation Wizard


Insert the **DCS-2100** CD into the CD-ROM drive.

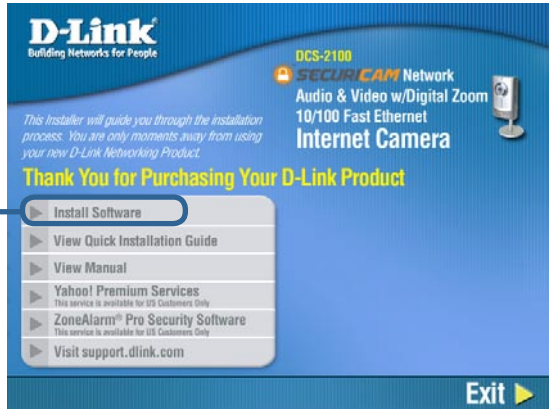

Click on **Install Software**

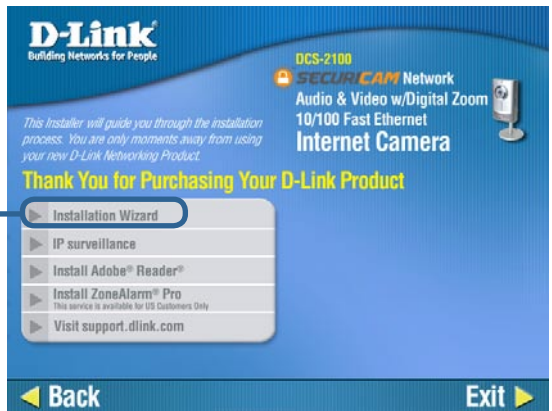




Click on **Installation Wizard**

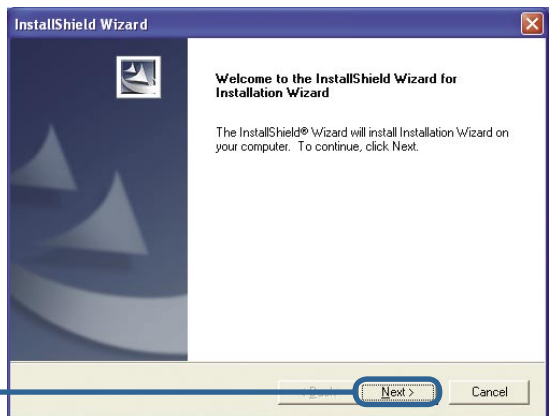

Click **Next**

2

Installing the Installation Wizard (continued)

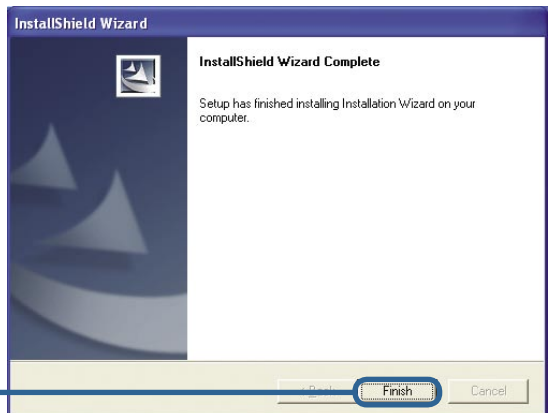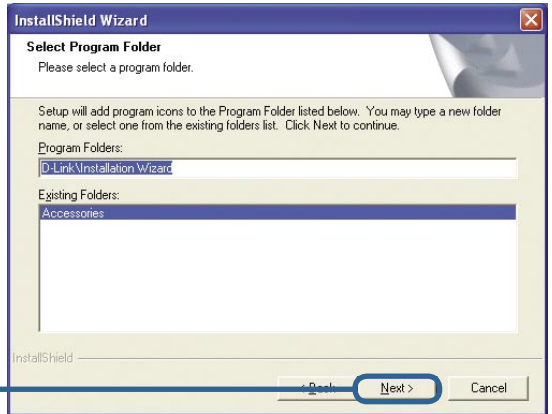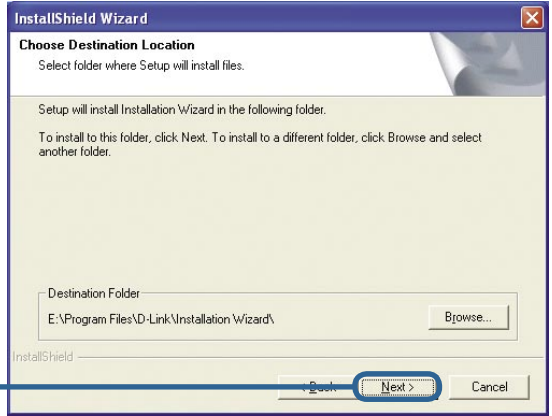


3

Configuring Your Camera with the Installation Wizard

Double click on the **Installation Wizard** that was created on your desktop.




The software will search for cameras.

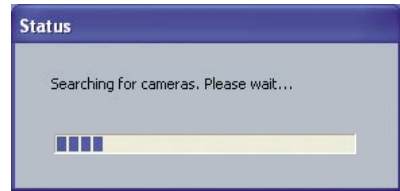

The Installation Wizard will appear and show the MAC address of the **DCS-2100** and an **IP Address**. If you have a DHCP* server on your network, there will be a valid IP Address displayed here, indicated by a “Yes” under the assigned column.

*A DHCP server is a device that supplies IP Addresses to its clients that are on the same network.

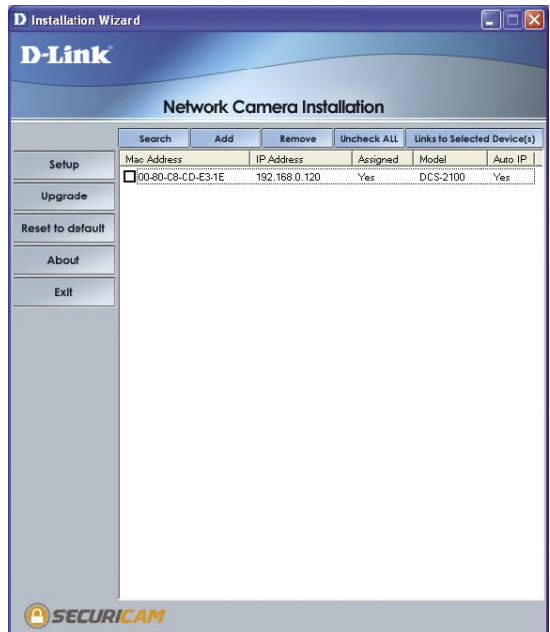


3

Configuring Your Camera with the Installation Wizard (continued)


If the **Installation Wizard** does not detect any devices, you will need to reset the camera. Press down on the reset button on the back panel of the camera for 2 cycles (the LED will flash blue and red continuously and stop twice). Let go when the LED starts to flash the second time.



Click **Search** to refresh the list of cameras if needed.

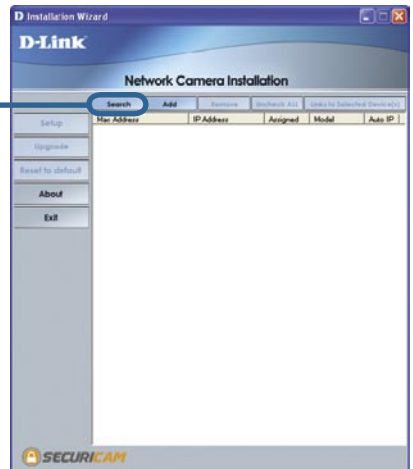


Once the camera appears, select the camera by placing a check mark in the box.

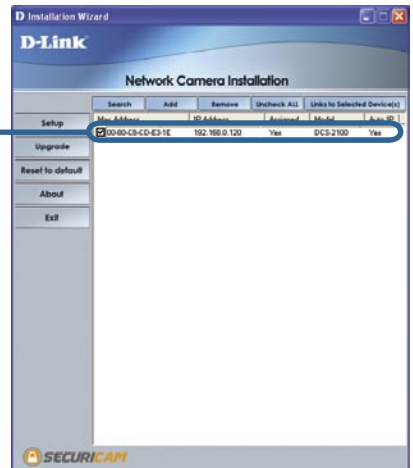

3


Configuring Your Camera with the Installation Wizard (continued)

Click the **Setup** button

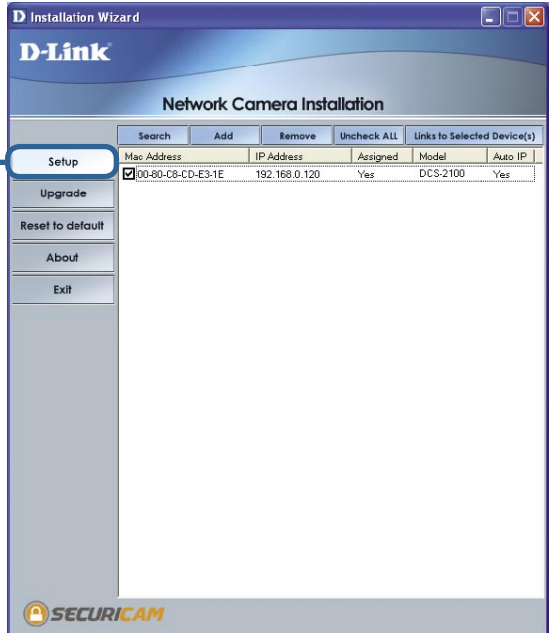

Enter an administrative password in the Root password and Confirm password fields.

Click the **Next** button

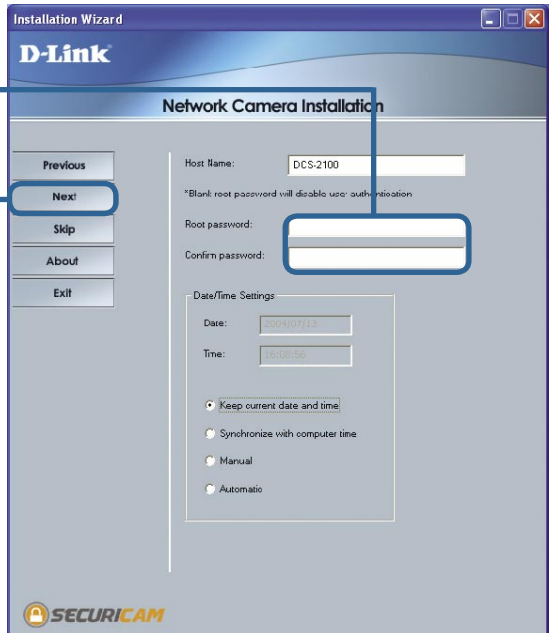

For details on the Date/Time Settings, please refer to the User Manual on the CD-ROM.


3

Configuring Your Camera with the Installation Wizard (continued)


Uncheck the box labeled **Reset IP address at next boot**

Click the **Next** button

If you need to modify the IP settings, please refer to the user manual on the CD-ROM.

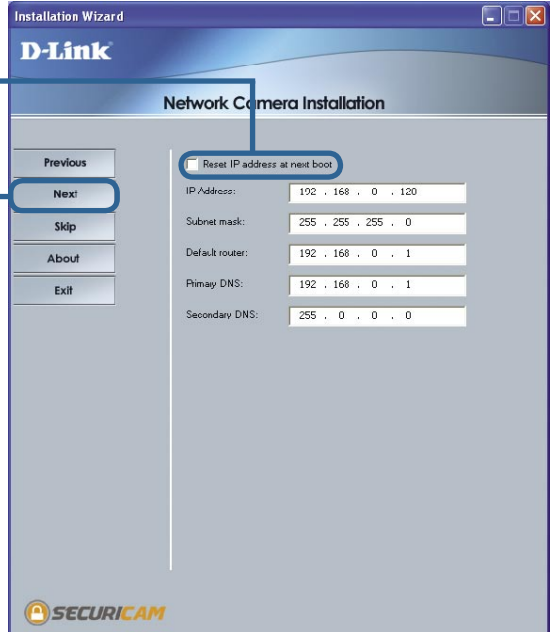


Click the **Apply** button

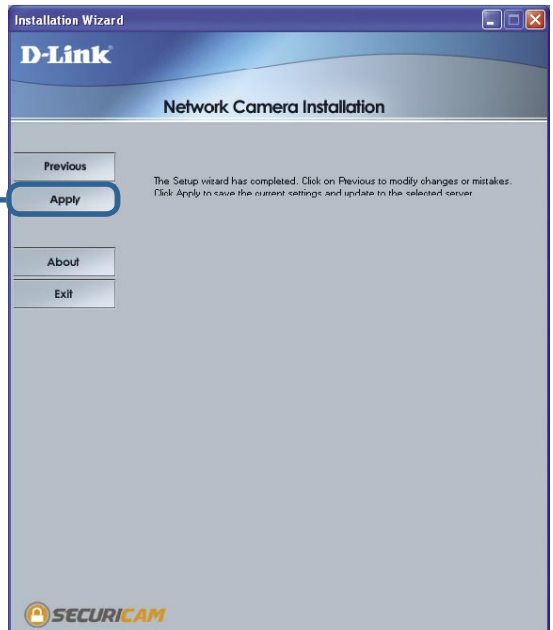

3


Configuring Your Camera with the Installation Wizard (continued)

After the settings have been saved, the Done button will appear.

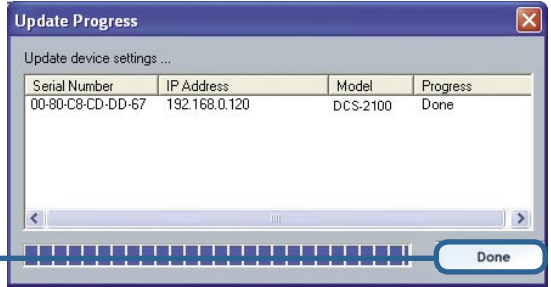

Click the **Done** button

Click the button labeled **Link to Selected Device(s)**

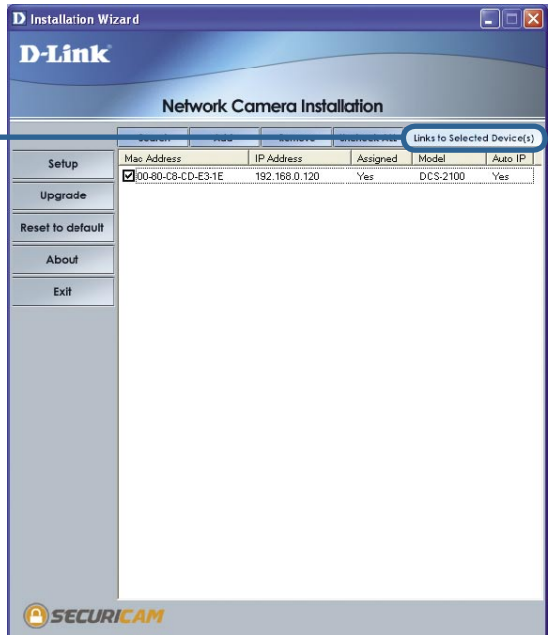

Notes

Technical Support

You can find software updates and user documentation on the D-Link website.

D-Link provides free technical support for customers within the United States and within Canada for the duration of the warranty period on this product.

U.S. and Canadian customers can contact D-Link Technical Support through our website, or by phone.

Tech Support for customers within the United States:

D-Link Technical Support over the Telephone:

(877) 453-5465

24 hours a day, seven days a week.

D-Link Technical Support over the Internet:

<http://support.dlink.com>

[email:support@dlink.com](mailto:support@dlink.com)

Tech Support for customers within Canada:

D-Link Technical Support over the Telephone:

(800) 361-5265

Monday to Friday 7:30am to 12:00am EST

D-Link Technical Support over the Internet:

<http://support.dlink.ca>

[email:support@dlink.ca](mailto:support@dlink.ca)

