



10/100 FAST ETHERNET PoE INTERNET CAMERA

ANYWHERE SURVEILLANCE

Monitor your home or office over the Internet from your web browser

POWER OVER ETHERNET

PoE support gives you more flexibility for camera installation

MOTION TRIGGERED RECORDING

Starts recording and sends e-mail alerts based on movement

EASY INSTALLATION AND PLACEMENT

With support for 802.3af Power over Ethernet (PoE) and a slim-line housing, the DCS-1110 is D-Link's most versatile camera yet. PoE support, when used with a compatible PoE power injector or PoE switch, eliminates the need for mounting the camera near a power supply. With 0.5 Lux light sensitivity, this camera is capable of capturing video in rooms with minimal lighting, making it ideal for use at night. When enclosed in an optional outdoor housing, the DCS-1110 makes an excellent home security camera.

ACCESS YOUR CAMERA ONLINE

You can access and control your camera using Internet Explorer. As you watch and listen remotely to video and sound obtained by the DCS-1110, you can record directly from the web browser to a local hard drive, making it ideal for capturing any moment no matter where you are. By signing up with one of the many free Dynamic DNS services available on the web, you can assign an easy-to-remember web address to the camera. Remotely access your camera without having to remember the IP address, even if your Internet Service Provider changes it.

MULTIPLE MANAGEMENT OPTIONS

IP View SE software is included to enhance the monitoring and management of the DCS-1110. Manage and monitor up to four compatible cameras simultaneously with this program. You can also use IP View SE to archive video straight to the hard drive, playback video, set up motion detection to trigger video/audio recording and send e-mail alerts. The DCS-1110 is configurable to record to a network-attached storage (NAS) device, eliminating the need to set up a dedicated computer for storing recorded video.

This camera also works great with D-Link's MediaLounge™ family of home entertainment products. After setting up the DCS-1110 to record to your PC's hard drive or a network-attached storage device, captured video can be played back using any of the MediaLounge Wireless Media Players. You can even configure your MediaLounge Wireless Media Player to connect to the DCS-1110 and play real-time video feed on your TV screen!

The DCS-1110, featuring PoE support and bundled with IP View SE, is a cost-effective and versatile security solution for your home or business.

WHAT THIS PRODUCT DOES


The D-Link 10/100 Fast Ethernet PoE Internet Camera (DCS-1110) is a full-featured surveillance system that connects to an Ethernet network to provide remote monitoring over the Internet. Since the DCS-1110 features Power over Ethernet (PoE) support, you can install this camera in locations without access to a power outlet when connecting the DCS-1110 to a PoE Injector or PoE Switch.

REMOTE MONITORING OPTIONS

Take snapshots or record to a local hard drive directly from a web browser without installing any additional software. For added flexibility, you can set up the DCS-1110 to record to a network-attached storage (NAS) device, eliminating the need to set up a dedicated computer for storing recorded video. With its built-in motion sensor, the DCS-1110 can send automated e-mail alerts and record video to your hard drive when motion is detected.



YOUR NETWORK SETUP

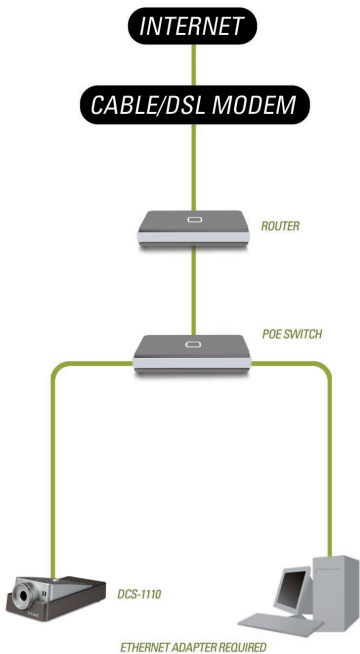

TECHNICAL SPECIFICATIONS

REMOTE MANAGEMENT

- + Configuration Accessible via a Web browser
- + Record to a Local Hard Drive via a Web Browser

NETWORKING PROTOCOL

- TCP/IP, HTTP, SMTP, DNS, DHCP, UPnP™, DDNS, PoE Support

CONNECTIVITY

- + 10/100Mbps Fast Ethernet
- + Auto Negotiation
- + Auto MDI/MDI-X
- + 802.3af Power over Ethernet

AUDIO/VIDEO ALGORITHM SUPPORTED

- + MPEG-4 Simple Profile
- + Audio ADPCM

VIDEO RESOLUTION

- + Up to 30fps at 160x120
- + Up to 30fps at 320x240
- + Up to 30fps at 640x480

CAMERA SPECIFICATION

- + 1/4" CMOS Sensor
- + 0.5 Lux @ F1.4
- + AGC/AWB
- + Electronic Shutter: 1/60~1/15000 sec.

SECURITY

- + Administrator and User Group Protected
- + Password Authentication

IP VIEW SE MANAGEMENT SOFTWARE

- + Remotely Manage and Control up to 4 DCS-1110 Internet Cameras
- + View Up to 4 Cameras on One Screen
- + Supports all Management Functions Provided in Web Interface
- + Record Video to Hard Drive or NAS in AVI Format
- + Scheduled, Motion Triggered, or Manual Recording Options

VIEWING SYSTEM REQUIREMENT PROTOCOL

ActiveX

LEDS

- + Power
- + Link

POWER

- + Power over Ethernet (PoE)
- + External Power Supply
- + 5V DC 2.5A
- + Power Consumption 8.5W

WEIGHT

0.73 lbs.

DIMENSIONS

5.46" (L) x 2.99" (W) x 1.77" (H)

WARRANTY

1-Year¹

¹ 1-Year Warranty available only in the U.S.A and Canada.

² Computer must adhere to Microsoft's recommended System Requirements. Please contact Microsoft for details.

³ Latest software and documentation are available at <http://support.dlink.com>.

All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.

SECURITY

MINIMUM SYSTEM REQUIREMENTS

Wired (10/100 Fast Ethernet) Network

PC with

1.3GHz Processor

128MB Memory

Windows® XP SP2 or

Windows 2000 SP4²

Internet Explorer v6

Multiple Camera Operation

Requires

PC with

2.4GHz Processor

512MB Memory

32MB Video Card

Windows® XP SP2 or

Windows 2000 SP4²

Internet Explorer v6

PACKAGE CONTENTS

10/100 Fast Ethernet PoE

Internet Camera

CAT5 Ethernet Cable

Power Adapter

Mounting Kit

CD-ROM³ with

Software

Product Documentation

Special Offers

Quick Installation Guide

D-Link Systems, Inc. 17595 Mt. Herrmann Street Fountain Valley CA 92708 www.dlink.com
 ©2006 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and other countries. Other trademarks or registered trademarks are the property of their respective owners. Visit www.dlink.com for more details.