


[Basic Manual Setup for G413X-How to force to 4G LTE network]


- 1) On a device that is connected to the router (preferably with a cable on a pc/laptop or WiFi on a phone is fine but please make sure your mobile data is off).

Note: this config is best done with a LAN cable.

- 2) Open a web Brower (internet explorer/google chrome/firefox) input the IP address of your router (default is 10.0.0.2 unless it was changed), we will use Microsoft Edge in this example.

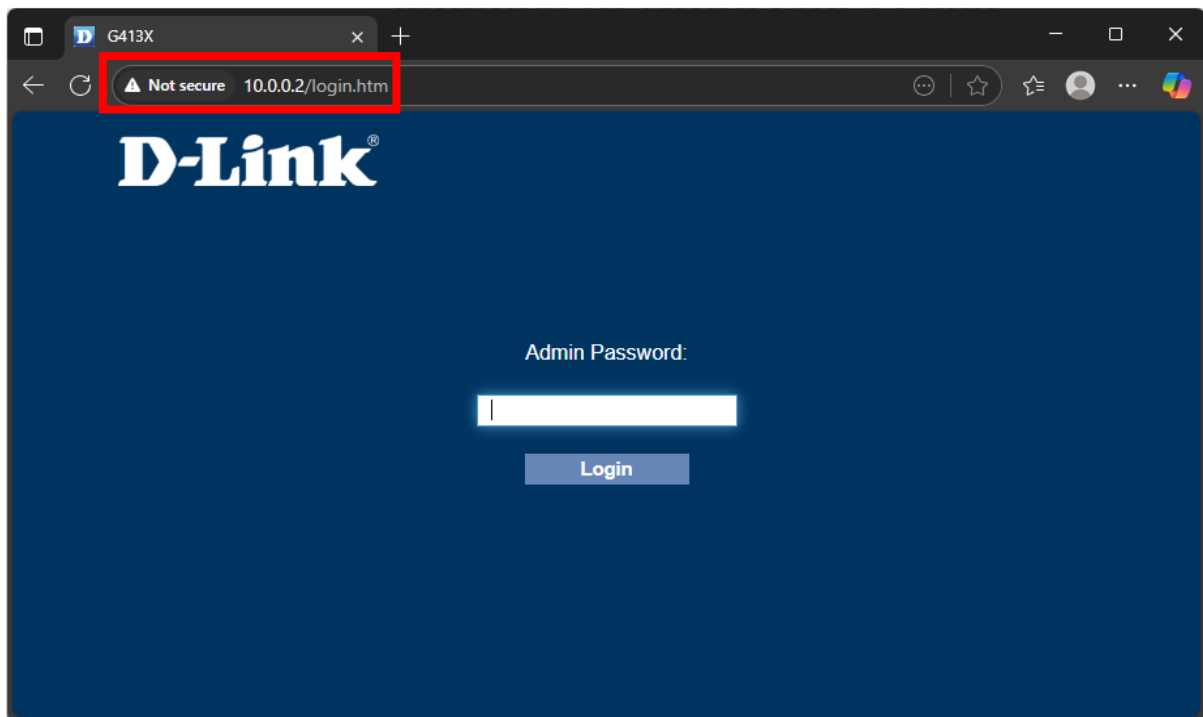

3) Login (default password is admin unless it was changed)

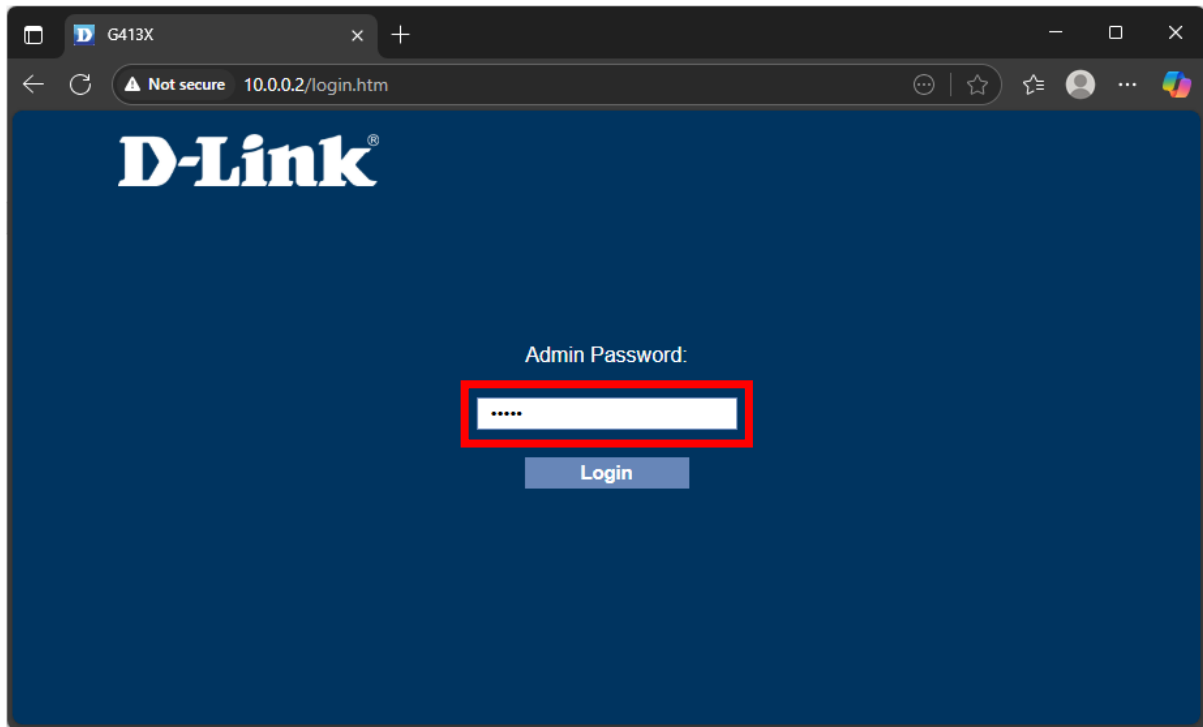

4) Go to LTE (top) then Basic Settings (left)

The screenshot shows the D-Link G413X web interface in a browser. The address bar shows '10.0.0.2/main.html'. The top navigation bar includes 'G413X', 'Status', 'Setup', 'Network', 'LTE' (highlighted with a red box), 'Wireless', 'EasyMesh', 'Features', and 'Management'. On the left sidebar, 'Basic Settings' is highlighted with a red box. The main content area is titled 'You can config the parameters for Internet network which 3G or LTE.' and contains the following settings:

- Enable: ☒
- User Name:
- Password:
- APN:
- PIN:
- Dial Number:
- Net Select:
- Auth Method:
- IP Version:
- MTU: (1280-1500 bytes)
- Manual APN: ☒
- Roaming: ☒
- Manual DNS: ☐

A 'Save & Apply' button is located at the bottom right of the settings area.

5) Click on [AUTO] that is next to Net Select and change to [4G only]

The screenshot shows the D-Link G413X web interface. The browser address bar shows '10.0.0.2/main.html'. The page has a navigation bar with tabs: Status, Setup, Network, LTE (selected), Wireless, EasyMesh, Features, and Management. On the left, there is a sidebar with options: Basic Settings (highlighted), PIN Manage, SMS Send, SMS Inbox, SMS Outbox, SMS Settings, USSD, AT Command, Data Cap, and LTE Fota. The main content area is titled 'You can config the parameters for Internet network which 3G or LTE.' and contains the following configuration fields:

- Enable: ☒
- User Name: any
- Password: any
- APN: TelkomInternet
- PIN:
- Dial Number: *99#
- Net Select: 4G Only (highlighted with a red box)
- Auth Method: NONE
- IP Version: IPV4V6
- MTU: 1500 (1280-1500 bytes)
- Manual APN: ☒
- Roaming: ☒
- Manual DNS: ☐

At the bottom of the configuration area is a 'Save & Apply' button.

6) Click on Save & Apply

The screenshot shows the D-Link G413X web interface in a browser window. The browser address bar shows "10.0.0.2/main.html". The interface has a top navigation bar with tabs: Status, Setup, Network, LTE (selected), Wireless, EasyMesh, Features, and Management. On the left, there is a sidebar menu with options: Basic Settings (selected), PIN Manage, SMS Send, SMS Inbox, SMS Outbox, SMS Settings, USSD, AT Command, Data Cap, and LTE Fota. The main content area is titled "You can config the parameters for Internet network which 3G or LTE." and contains the following configuration fields:

- Enable: ☒
- User Name:
- Password:
- APN:
- PIN:
- Dial Number:
- Net Select: - Auth Method: - IP Version: - MTU: (1280-1500 bytes)
- Manual APN: ☒
- Roaming: ☒
- Manual DNS: ☐

At the bottom of the configuration area, there is a "Save & Apply" button, which is highlighted with a red rectangular box.

7) Restart the router & the change is done