


[Basic Manual Setup for G413X-How to change APN setting]


- 1) On a device that is connected to the router (preferably with a cable on a pc/laptop or WiFi on a phone is fine but please make sure your mobile data is off).

Note: this config is best done with a LAN cable.

- 2) Open a web Brower (internet explorer/google chrome/firefox) input the IP address of your router (default is 10.0.0.2 unless it was changed), we will use Microsoft Edge in this example.

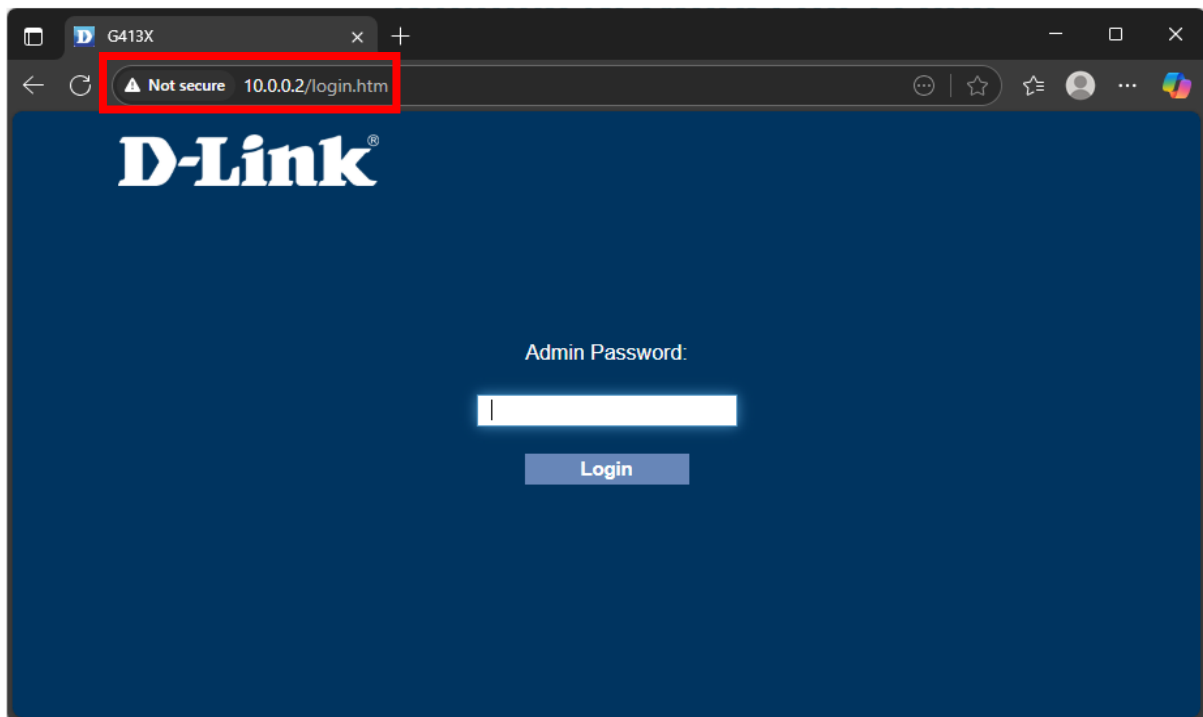

3) Login (default password is admin unless it was changed)

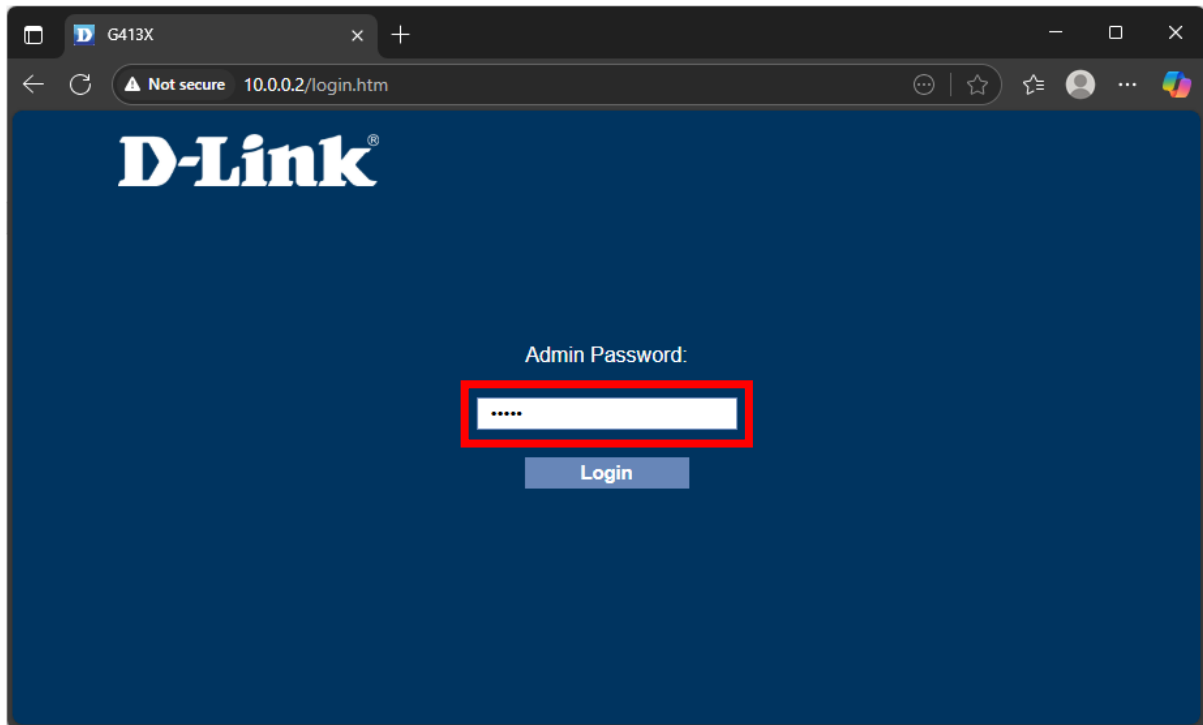

4) Go to LTE (top) then Basic Settings (left)

The screenshot shows the D-Link G413X web interface in a browser. The address bar shows "10.0.0.2/main.html". The top navigation bar includes "G413X", "Status", "Setup", "Network", "LTE", "Wireless", "EasyMesh", "Features", and "Management". The "LTE" tab is highlighted. On the left sidebar, "Basic Settings" is highlighted. The main content area is titled "You can config the parameters for Internet network which 3G or LTE." and contains the following configuration options:

- Enable: ☒
- User Name:
- Password:
- APN:
- PIN:
- Dial Number:
- Net Select:
- Auth Method:
- IP Version:
- MTU: (1280-1500 bytes)
- Manual APN: ☒
- Roaming: ☒
- Manual DNS: ☐

A "Save & Apply" button is located at the bottom right of the configuration area.

5) Click on the info next to [APN] and change according to what your ISP provided.

The screenshot shows the D-Link G413X web interface. The browser address bar shows '10.0.0.2/main.html'. The interface has a top navigation bar with tabs: Status, Setup, Network, LTE (selected), Wireless, EasyMesh, Features, and Management. On the left, there is a sidebar menu with options: Basic Settings (highlighted), PIN Manage, SMS Send, SMS Inbox, SMS Outbox, SMS Settings, USSD, AT Command, Data Cap, and LTE Fota. The main content area is titled 'You can config the parameters for Internet network which 3G or LTE.' and contains the following configuration fields:

- Enable: ☒
- User Name: any
- Password: any
- APN: TelkomInternet (highlighted with a red box)
- PIN:
- Dial Number: *99#
- Net Select: 4G Only (dropdown menu)
- Auth Method: NONE (dropdown menu)
- IP Version: IPV4V6 (dropdown menu)
- MTU: 1500 (1280-1500 bytes)
- Manual APN: ☒
- Roaming: ☒
- Manual DNS: ☐

At the bottom right of the configuration area is a 'Save & Apply' button.

6) Click on Save & Apply

D-Link®

G413X
HW:A1 FW:TK_1.00

Status

Setup

Network

LTE

Wireless

EasyMesh

Features

Management

Basic Settings

PIN Manage

SMS Send

SMS Inbox

SMS Outbox

SMS Settings

USSD

AT Command

Data Cap

LTE Fota

You can config the parameters for Internet network which 3G or LTE.

Enable: ☒

User Name:

Password:

APN:

PIN:

Dial Number:

Net Select:

Auth Method:

IP Version:

MTU: (1280-1500 bytes)

Manual APN: ☒

Roaming: ☒

Manual DNS: ☐

Save & Apply

7) Restart the router & the change is done