

D-Link[®]
Building Networks for People

DCS-950



Remote Audio & Video Surveillance

- Monitor Your Home or Office over the Internet
- Take Snapshots and Record to a Local Hard Drive Directly from a Web Browser
- Captures Video in Extreme Low Light Environments¹
- Motion Detection Triggers Recording and Sends E-mail Alerts
- Also Records Directly to Network-Attached Storage

SECURICAM Network *10/100 Fast Ethernet* **Internet Camera**

D-Link is pleased to introduce the D-Link SECURICAM Network DCS-950 Internet Camera, a full-featured surveillance system that connects to an Ethernet broadband network to provide remote high-quality audio and video.

You can access and control the DCS-950 using Internet Explorer version 6. As you watch and listen remotely to video and sound obtained by the DCS-950, you can take snapshots or record directly from the web browser to a local hard drive without installing any software, making it ideal for capturing any moment no matter where you are.

Get even more recording flexibility. Now you can configure the DCS-950 to record to network-attached storage (NAS), eliminating the need to set up a dedicated computer for storing recorded video.

The DCS-950 also works great with D-Link's MediaLounge™ family of networking products, including the award-winning DSM-320 Wireless Media Player. After setting up the DCS-950 to record to your PC's hard drive or a network-attached storage, captured video can be streamed to the DSM-320 and displayed on your TV screen! Now you can see what took place throughout the rest of your home – all from the comfort of your living room.

¹ Light sensitivity of 0.5 lux.

With 0.5 lux light sensitivity, the DCS-950 is capable of capturing video in rooms with minimal lighting, making it ideal for use at night time.

The DCS-950 adheres to the Universal Plug & Play (UPnP™) specification which allows computers running Windows® XP/Me to recognize the DCS-950 and automatically add it to the network. The DCS-950 can be accessed and viewed from "My Network Places" as a device on the network.

By signing up with one of the many free Dynamic DNS services available on the web, you can assign an easy-to-remember name and domain to the camera (e.g. www.mycamera.myddns.com). This allows you to remotely access your camera without having to remember the IP address, even if it has been changed by your Internet Service Provider.

Simple installation procedures, along with the built-in web-based interface offer easy integration into your network environment. Powerful surveillance software is included to enhance the monitoring and management for multiple cameras, allowing you to archive video straight to the hard drive, playback video, monitor up to four cameras on a single screen, and set up motion detection to trigger video/audio recording and send e-mail alerts. The DCS-950 is a cost-effective and versatile security solution for your home or business.

 **SECURICAM Network**
 10/100 Fast Ethernet
Internet Camera

DCS-950



TECHNICAL SPECIFICATIONS

Remote Management

- Configuration Accessible via Web Browser
- Record to a Local Hard Drive via Web Browser

Networking Protocol

TCP/IP, HTTP, SMTP, FTP, Telnet, NTP, DNS, DHCP, UPnP™, DDNS, PPOE Support

Connectivity

- 10/100Mbps Fast Ethernet
- Auto Negotiation
- Auto MDI/MDI-X

Video Algorithm Supported

- MPEG4 Simple Profile
- Audio ADPCM

Video Resolution

- Up to 30fps at 160x120
- Up to 30fps at 320x240
- Up to 30fps at 640x480

Camera Specification

- 1/4" CMOS Sensor
- 0.5 Lux @ F1.4
- AGC/AWB
- Electronic Shutter: 1/60~1/15000 sec.
- Standard CS Mount Type Lens 4mm, F2.0

Security

- Administrator and User Group Protected
- Password Authentication

IP View Lite Management Software

- Remotely Manage and Control up to 4 DCS-950 Internet Cameras
- View Up to 4 Cameras on One Screen
- Supports all Management Functions Provided in Web Interface
- Record Video to Hard Drive in AVI format
- Scheduled, Motion Triggered, or Manual Recording Options

Viewing System Protocol Requirement
ActiveX

Operating System

Microsoft Windows® XP, 2000, Me, or 98SE

Browser

Internet Explorer v6

LEDs

Power
Link

Power

- External Power Supply
- 5V DC 2.5A
- Power Consumption 8.5W

Weight

6 oz.


Dimensions

3.1" (L) x 3.6" (W) x 5.5" (H)

Warranty

1 Year

Remotely Monitor Video and Audio over the Internet

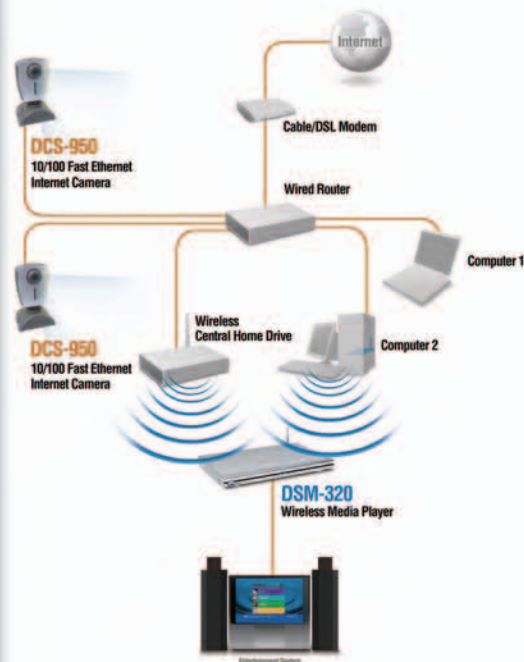

Use of audio or video equipment for recording the image or voice of a person without their knowledge and consent is prohibited in certain states or jurisdictions. Nothing herein represents a warranty or representation that the D-Link product provided herein is suitable for the end-user's intended use under the applicable laws of his or her state. D-Link disclaims any liability whatsoever for any end-user use of the D-Link product which fails to comply applicable state, local or federal laws.

