

## Product Highlights

### Automate Your Home with Motion Detection

Attach to a wall in a key area of your house, and switch on your lights or mydlink-enabled cameras whenever someone is nearby

### Seamless Connected Home Integration

Connect to your mydlink Connected Home Z-Wave gateway using D-Link's unique protocol, ensuring optimal compatibility

### Sets Up in Minutes

Use the intuitive mydlink Home app for your tablet or smartphone to get your home automated in a matter of minutes



## DCH-Z120

# mydlink™ Z-Wave Motion Sensor

## Features

### Easy to Install

- Easily configured using the mydlink Home app for your smartphone or tablet
- Wireless functionality keeps your home free of clutter

### Automate Your Home

- Detect movement with the built-in passive infrared (PIR) sensor
- Create rules and turn on cameras or lights automatically when the sensor is triggered
- Receive notifications on your mobile phone

### Z-Wave Plus

- Uses Z-Wave 500 Series chip
- Speeds of up to 100 kbps

### Security

- AES 128-bit encryption for Z-Wave
- Uses D-Link's own protocol for secure communication with all your mydlink Home devices

The DCH-Z120 mydlink™ Z-Wave Motion Sensor is a Connected Home Z-Wave motion sensor that detects motion within its field of view, providing you with a trigger for automating your home. Integrating with D-Link's HNAP protocol, the DCH-Z120 connects seamlessly with your D-Link connected home Z-Wave gateway, guaranteeing compatibility and getting your connected home network up and running right away.

## Automate Your Home

Using the latest Z-Wave Plus technology, the mydlink™ Z-Wave Motion Sensor connects to your Z-Wave gateway, and acts as a trigger for your connected home network whenever motion is detected within its field of view. Secure your home by automatically switching on mydlink-enabled cameras, receive notifications to give you peace of mind, or save power by having the lights and other electronic devices switch off automatically when you go out. Whatever your home needs, mydlink Connected Home has you covered.

## Convenient & Intuitive Setup

The mydlink Home app for your smartphone or tablet allows you to get the DCH-Z120 up and running in minutes. D-Link's unique HNAP protocol is specially designed for D-Link products to seamlessly integrate with one another, ensuring maximum compatibility and greatly speeding up the connection process.

## Robust Security Features


The DCH-Z120 mydlink™ Z-Wave Motion Sensor is protected with powerful 128-bit AES encryption, preventing attackers from disrupting the connection between the sensor and your Z-Wave gateway, giving you peace of mind while you're away from home.

# DCH-Z120 mydlink™ Z-Wave Motion Sensor

Front View



Back View

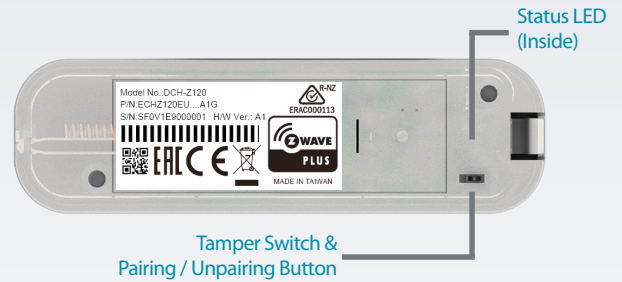

## Technical Specifications

### General

Networking Protocol Support	<ul style="list-style-type: none"> <li>• Z-Wave v6.02 or above</li> </ul>
Z-Wave Wireless	<ul style="list-style-type: none"> <li>• 868.40 MHz (Europe / China / Singapore / South Africa)</li> <li>• 908.40 MHz (United States / Canada / Mexico / Chile)</li> <li>• 916.00 MHz (Israel)</li> <li>• 919.80 MHz (Hong Kong)</li> <li>• 921.40 MHz (Australia / New Zealand / Brazil)</li> <li>• 922.50 / 923.90 / 926.30 MHz (Taiwan / JP)</li> </ul>
PIR Range	<ul style="list-style-type: none"> <li>• Maximum 10 meters</li> </ul>
Buttons	<ul style="list-style-type: none"> <li>• Tamper switch &amp; pairing/unpairing button</li> </ul>
LED	<ul style="list-style-type: none"> <li>• Status</li> </ul>

### Physical

Dimensions	<ul style="list-style-type: none"> <li>• Sensor: 96 x 28 x 23 mm (3.78 x 1.10 x 0.91 inches)</li> </ul>
Power	<ul style="list-style-type: none"> <li>• Included 3 V battery (CR123A)</li> </ul>
Temperature	<ul style="list-style-type: none"> <li>• Operating: -10 to 40 °C (14 to 104 °F)</li> <li>• Storage: -20 to 70 °C (-4 to 158 °F)</li> </ul>
Humidity	<ul style="list-style-type: none"> <li>• Operating: 20% to 90% non-condensing</li> <li>• Storage: 5% to 95% non-condensing</li> </ul>
Certifications	<ul style="list-style-type: none"> <li>• FCC</li> <li>• CE</li> <li>• Z-Wave Plus</li> </ul>

### Order Information

Part Number	Description
DCH-Z120	mydlink™ Z-Wave Motion Sensor

Updated 2015/06/15