

Product Highlights

High-speed Internet

Latest ADSL2/2+ standards provide Internet transmission of up to 24 Mbps downstream for fast downloads and smooth streaming media

High-performance Wireless

Fast 802.11n wireless gives you superior speed and range while remaining compatible with older 802.11g/b devices

Safe Connection

Robust security features keep your connection secure, preventing unauthorized access to the network while minimizing traffic for a smooth connection



DSL-2750U

Wireless N ADSL2+ 4-Port Wi-Fi Router

Features

Superior Performance Wireless

- Integrated ADSL2/2+
- 802.11n wireless LAN
- 4 Ethernet switch ports
- 5 dBi fixed antenna

Robust Security Features

- WPA/WPA2 and WEP
- Stateful Packet Inspection (SPI)
- Quality of Service (QoS)

High Speed Connectivity

- Supports download speeds up to 24 Mbps
- Firewall protection
- Share Internet connection with a compatible 3G USB adapter

The DSL-2750U Wireless N ADSL2+ 4-Port Wi-Fi Router is a versatile, high-performance router for home and the small office. With integrated ADSL2/2+, supporting download speeds up to 24 Mbps, firewall protection, Quality of Service (QoS), 802.11n wireless LAN, and four Ethernet switch ports, the DSL-2750U provides all the functions that a home or small office needs to establish a secure and high-speed link to the Internet.

Ultimate Wireless Connection

The DSL-2750U reaches wireless speeds that are up to 4 times faster than 802.11g. Maximize wireless performance by connecting it to computers equipped with wireless N interfaces and stay connected from virtually anywhere at home and in the office. The DSL-2750U can also be used with 802.11g and 802.11b wireless networks to enable significantly improved reception. You can even share your mobile Internet connection when on the road by connecting a compatible 3G USB adapter.


Secure Connection

The DSL-2750Us security features prevent unauthorized access to the home and office network from wireless devices or from the Internet. The Wireless N ADSL2+ 4-Port Wi-Fi Router provides firewall security, such as Stateful Packet Inspection (SPI) and hacker attack logging. SPI inspects the contents of incoming packets before they are allowed in, while hacker logging helps to protect your network against Denial of Service (DoS) attacks. For Quality of Service (QoS), the router supports priority queues to enable a group of home or office users to experience the benefit of a smooth network connection without worrying about traffic congestion. Additionally, it supports WPA/WPA2 and WEP for flexible user access security and data encryption methods, while a built-in WPS button provides an easy way to establish a secure wireless connection.

Compatibility Assurance

The Wireless N ADSL2+ 4-Port Wi-Fi Router is backward compatible with existing 802.11b and 802.11g wireless equipment, ensuring compatibility with a wide range of wireless devices, making your older devices still relevant. In addition, it includes four Ethernet ports for connecting Ethernet-enabled PCs, print servers, and other devices, making it the logical choice for users who want a versatile and fast wired router. Lastly, the DSL-2750U gives you the

option to connect to your broadband modem by way of a WAN/LAN Ethernet port so you have the freedom to access the Internet via ADSL, Cable, or other connection types.

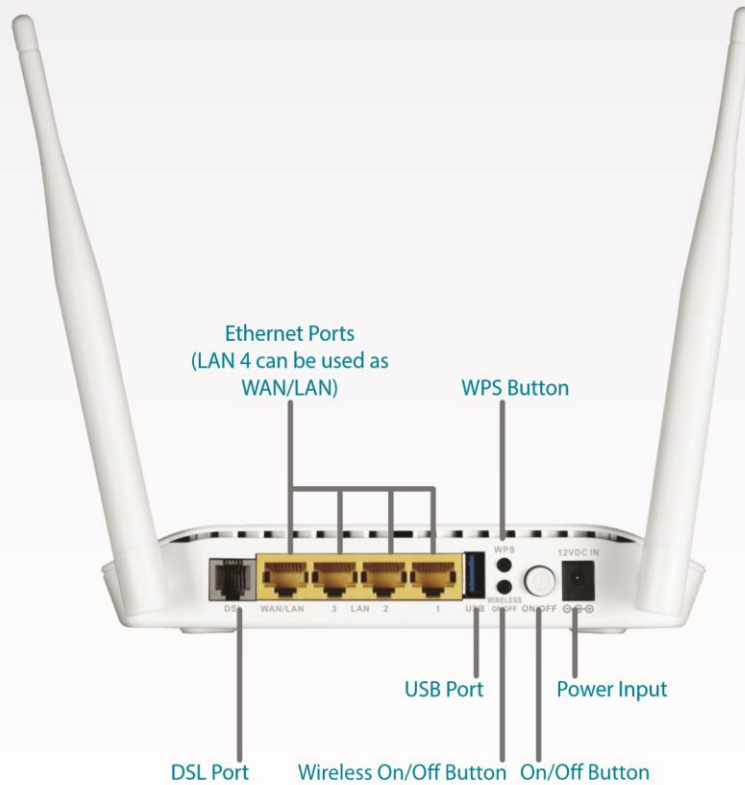

Technical Specifications

General

Device Interfaces	<ul style="list-style-type: none"> • RJ-11 ADSL port • 4 RJ-45 10/100BASE-TX Ethernet ports with auto MDI/MDIX • Built-in 802.11n wireless LAN • Factory reset button 	<ul style="list-style-type: none"> • WPS button • Wireless on/off switch (optional) • Power on/off switch • USB host 2.0 • WDS
ADSL Standards	<ul style="list-style-type: none"> • Multi-mode • ANSIT1.413 Issue 2 • ITU G.992.1 (G.dmt) Annex A 	<ul style="list-style-type: none"> • ITU G.992.2 (G.lite) Annex A • ITU G.994.1 (G.hs)
ADSL2 Standards	<ul style="list-style-type: none"> • ITU G.992.3 (G.dmt.bis) • Annex A/L/M, ITU G.992.4 (G.lite.bis) Annex A 	<ul style="list-style-type: none"> • ITU.G.992.5 Annex L/M (optional)

DSL-2750U Wireless N ADSL2+ 4-Port Wi-Fi Router

Functionality		
General	<ul style="list-style-type: none"> • 802.11b/g/n standards • Wireless speed: up to 54 Mbps (802.11g), 300 Mbps (802.11n) • G.dmt: 8 Mbps downstream, 832 Kbps upstream • G.lite: 1.5 Mbps downstream, 512 Kbps upstream • ADSL2: 12 Mbps downstream, 1 Mbps upstream • ATM Forum UNI3.1/4.0 PVC (up to 8 PVCs) • Frequency range: 2.4 GHz to 2.484 GHz • Antennas: Dual 2x2 fixed MIMO antennas 	<ul style="list-style-type: none"> • ADSL2+: 24 Mbps downstream, 1 Mbps upstream • VC and LLC based multiplexing • PPP over Ethernet (PPPoE) • PPP over ATM (RFC 2364) • ITU-T I.610 OAM F4/F5 • ATM Adaptation Layer Type 5 (AAL5) • ATM QoS (Traffic Shaping) • Bridged or routed Ethernet encapsulation
Router Features	<ul style="list-style-type: none"> • NAT & NAPT • DHCP server/client/relay • Static Routing, RIP v.1, v.2 • Universal Plug and Play (UPnP) compliant • Dynamic Domain Name System (DDNS) • Virtual server 	<ul style="list-style-type: none"> • SNTP, DNS proxy and IGMP proxy • Built-in NAT firewall • Stateful Packet Inspection (SPI) • DoS attacks prevention • Packet filtering (IP/ICMP/TCP/UDP) • Supports IPv6
Virtual Private Network (VPN)	<ul style="list-style-type: none"> • Multiple PPTP/IPSec/L2TP pass-through 	
Device Configuration/Management	<ul style="list-style-type: none"> • Ethernet WAN Uplink • Installation wizard (optional) • Web-based GUI for configuration, firmware upgrade • Code lock to prevent improper firmware upgrade 	<ul style="list-style-type: none"> • Scheduled reboot • Telnet • Syslog monitoring
USB	<ul style="list-style-type: none"> • USB storage 	<ul style="list-style-type: none"> • Compatible 3G USB adapter connection
Quality of Service	<ul style="list-style-type: none"> • 802.1p (0 to 7) traffic tagging • IGMP snooping with 32 Multicast groups 	<ul style="list-style-type: none"> • PVC/VLAN port mapping (bridge mode)
Security	<ul style="list-style-type: none"> • IGMP • PVC/VLAN port mapping (bridge mode) 64/128 bits • Parental control • WEP data encryption 	<ul style="list-style-type: none"> • WPA/WPA2 (Wi-Fi Protected Access) security • MAC address-based access control • WPS
Power Input	<ul style="list-style-type: none"> • Through 12 V / 1 A external power adapter 	
Status LEDs	<ul style="list-style-type: none"> • Power • LAN (1 to 4) • WLAN • WPS 	<ul style="list-style-type: none"> • USB • DSL • Internet
Physical		
Dimensions	<ul style="list-style-type: none"> • 174 x 139 x 28 mm (6.85 x 5.47 x 1.1 inches) 	
Weight	<ul style="list-style-type: none"> • 113.4 grams (4 ounces) 	
Power	<ul style="list-style-type: none"> • Input: 100 to 240 V AC, 50/60 Hz 	<ul style="list-style-type: none"> • Output: 5 V DC, 750 mA (via USB port)
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 40 °C (32 to 104 °F) 	<ul style="list-style-type: none"> • Storage: -20 to 65 °C (-4 to 149 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 0% to 90% non-condensing 	<ul style="list-style-type: none"> • Storage: 5% to 95% non-condensing
Certifications	<ul style="list-style-type: none"> • CE 	
Order Information		
<i>Part Number</i>	<i>Description</i>	
DSL-2750U	Wireless N ADSL2+ 4-Port Wi-Fi Router	

Updated 2015/05/11