


# D-Link DSL-2750U Firmware Upgrade



# POWER ADAPTER CONNECTION

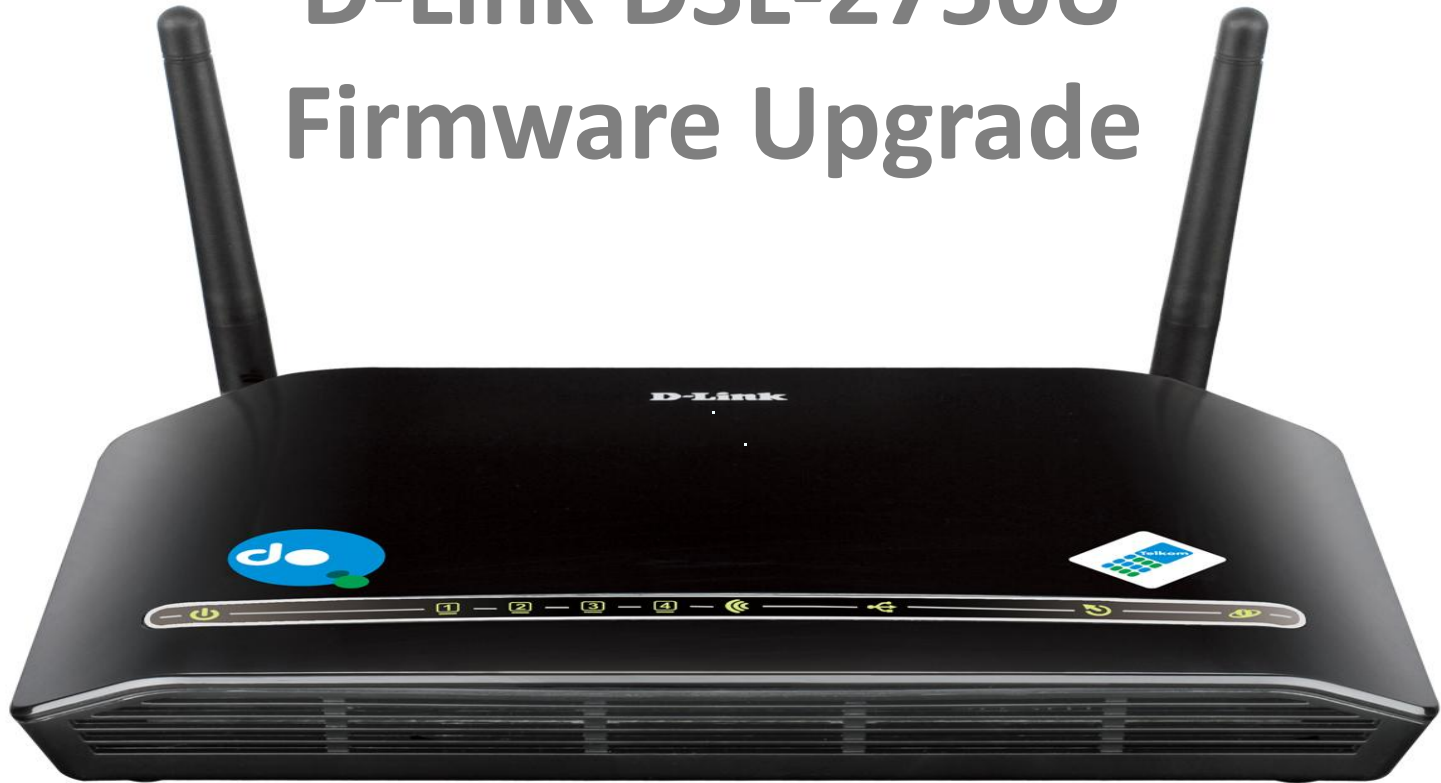

**POWER UP**  
your Business




- Plug the 3-Pin Power Supply/ Lightning Protection unit into the wall outlet and then connect the other end of it (12VDC IN)

# LAN CONNECTION



**POWER UP**  
your Business

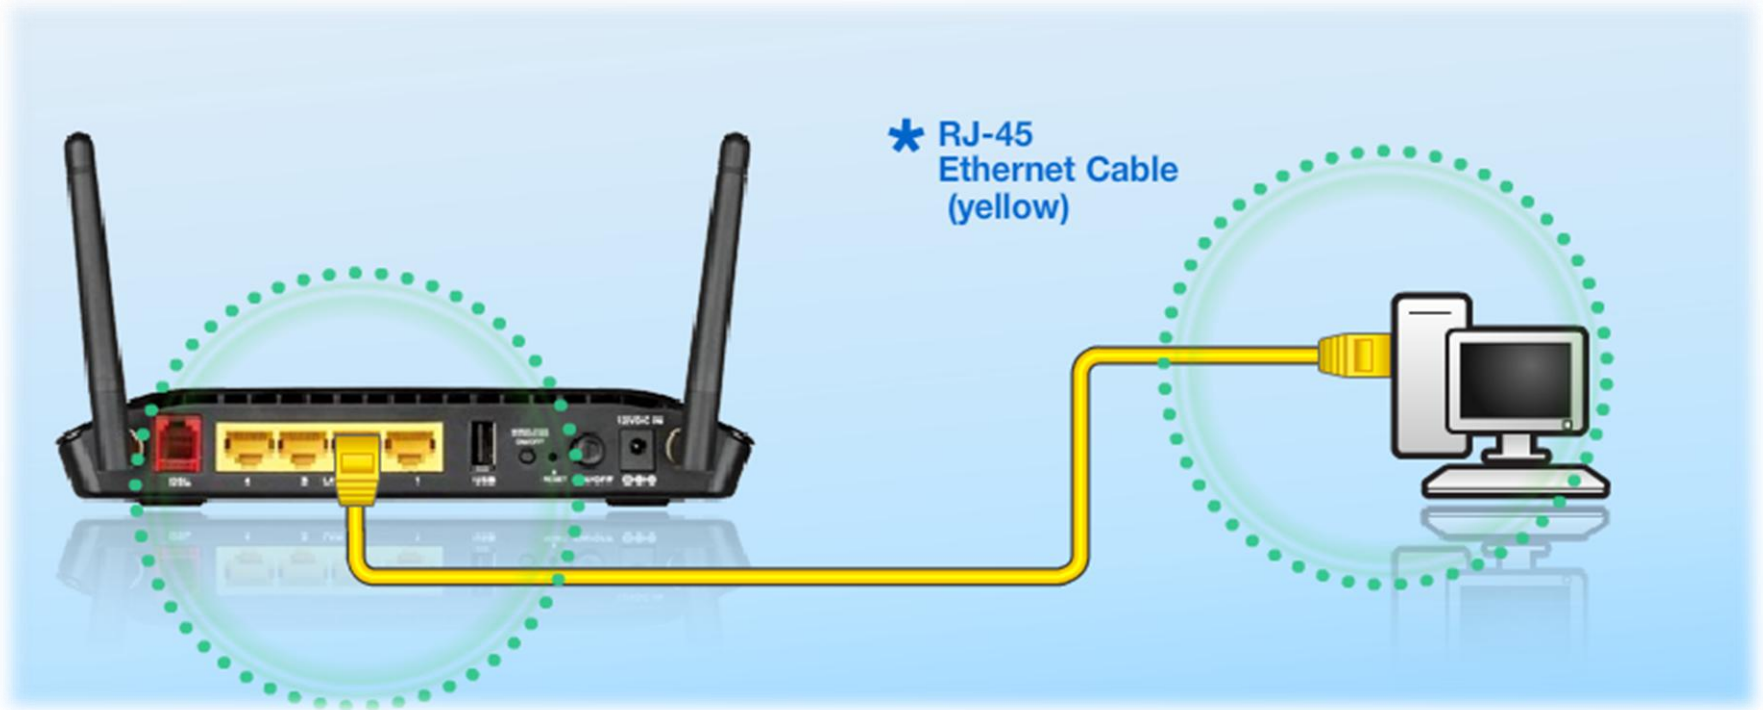

- Connect the Ethernet LAN Cable to any (yellow) port on the Router and connect the other end to the LAN port of the PC


# CONNECTING TO THE UNIT VIA WEB GUI



**POWER UP**  
your Business

## How to login to Unit using the Web GUI

1. Go to your Internet Explorer or Default Browser.
2. In your URL field, type the **Default IP (10.0.0.2) of router.**
3. A login page will appear and you will be prompted for a **Username and Password** these are both **“admin”**

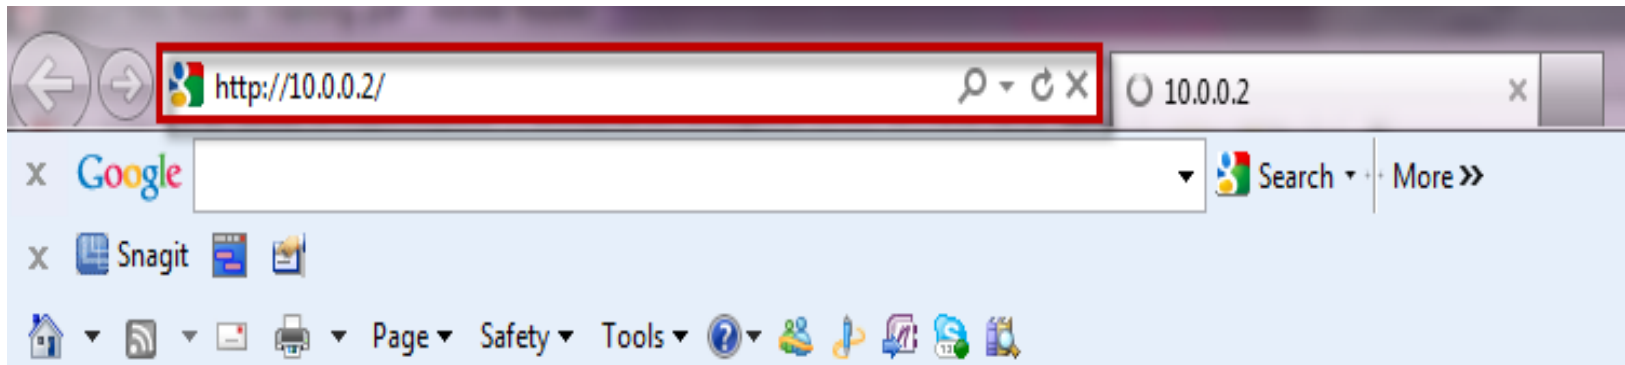

Username: admin

Password: admin

Product Page: DSL-2750U Firmware Version: AF\_1.57\_T10

**D-Link**

**LOGIN**

Welcome to DSL-2750U Web Management

Username :

Password :

Remember my login info.

Login

**WIRELESS**



If your username and password details are correct, you will be taken to the “Home Screen” from where you can navigate your way around.

The screenshot displays the D-Link DSL-2750U Web GUI. At the top, it shows 'Product Page: DSL-2750U' and 'Firmware Version: AF\_1.57\_T10'. The main header features the D-Link logo. Below this is a navigation menu with tabs for 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'SETUP' tab is active, showing a sidebar with options like 'Wizard', 'Internet Setup', '3G Internet Setup', 'Wireless Connection', 'Local Network', 'Time and Date', 'Print Server', and 'Logout'. The main content area is titled 'SETTING UP YOUR INTERNET' and contains the following text: 'There are two ways to set up your Internet connection. You can use the Web-based Internet Connection Setup Wizard or you can manually configure the connection. Please make sure you have your ISP's connection settings first if you choose manual setup.' Below this is the 'INTERNET CONNECTION WIZARD' section, which states: 'You can use this wizard for assistance and quick connection of your new D-Link Router to the Internet. You will be presented with step-by-step instructions in order to get your Internet connection up and running. Click the button below to begin.' A 'Setup Wizard' button is centered below the text. A 'Note' at the bottom of the wizard section reads: 'Note: Before launching the wizard, please ensure you have correctly followed the steps outlined in the Quick Installation Guide included with the router.' On the right side, there is a 'Helpful Hints...' section with text: 'First time users are recommended to run the Setup Wizard. Click the Setup Wizard button and you will be guided step by step through the process of setting up your ADSL connection. If you consider yourself an advanced user or have configured a router before, click Setup->Internet Setup to input all the settings manually.' A 'More...' link is also present. The bottom of the page features a 'WIRELESS' section header.

# Firmware Upgrade.



**POWER UP**  
your Business

Once logged into the DSL-2750U click on *Maintenance* followed by *Firmware Update*.

The screenshot shows the D-Link DSL-2750U web interface. At the top left is the D-Link logo. Below it is a navigation bar with tabs for SETUP, ADVANCED, MAINTENANCE (highlighted with a red box), STATUS, and HELP. On the left side, there is a sidebar menu with items: System, Firmware Update (highlighted with a red box), Access Controls, Diagnostics, System Log, and Logout. The main content area is divided into two sections: 'SYSTEM -- REBOOT' and 'SYSTEM -- BACKUP SETTINGS'. The 'SYSTEM -- REBOOT' section contains the text 'Click the button below to reboot the router.' and a 'Reboot' button. The 'SYSTEM -- BACKUP SETTINGS' section contains the text 'Back up DSL Router configurations. You may save your router configurations to a file on your PC.' followed by a red note: 'Note: Please always save configuration file first before viewing it.' and a 'Backup Settings' button. On the right side, there is a 'Helpful Hints...' section with text explaining the reboot and backup functions.

DSL-2750U	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
System	<b>SYSTEM -- REBOOT</b> Click the button below to reboot the router. <input type="button" value="Reboot"/>				<b>Helpful Hints...</b> This page allows you to reboot your router or save your router configuration to a file on your computer as a precaution in case you have to reset your router to factory default settings. You will be able to restore your router settings from a previously saved configuration file. There is also a function to allow you to reset your router to factory default settings. Resetting your router to factory default settings will delete your
<b>Firmware Update</b>					
Access Controls					
Diagnostics					
System Log					
Logout					
	<b>SYSTEM -- BACKUP SETTINGS</b> Back up DSL Router configurations. You may save your router configurations to a file on your PC. <b>Note: Please always save configuration file first before viewing it.</b> <input type="button" value="Backup Settings"/>				


Click on **Browse** and browse to the required firmware on your computer.

**Gan5.CT02W-B-DL-R4B061-DAF.EN\_upgrade(AF\_1.61\_T10)**

The screenshot shows the D-Link web interface for a DSL-2750U router. The top navigation bar includes 'DSL-2750U', 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'MAINTENANCE' tab is active, displaying the 'FIRMWARE UPDATE' section. This section contains three steps: Step 1 (obtain firmware from ISP), Step 2 (enter path or click 'Browse'), and Step 3 (click 'Update Firmware'). A note states the update takes about 2 minutes and the router will reboot. Below the steps, the current firmware version is 'AF\_1.59\_T10' and the date is 'Oct 11 2011'. A text input field for 'Firmware File Name' is highlighted with a red box, with a 'Browse...' button to its right. At the bottom, there is an 'Update Firmware' button. On the right side, a 'Helpful Hints...' section provides a 'Please Note' about technical support and a 'More...' link.

DSL-2750U	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
System	<b>FIRMWARE UPDATE</b>				<b>Helpful Hints...</b> <b>Please Note:</b> This page displays your device firmware version and information that will be helpful for D-Link technicians should you require any technical support. If your router is working without issue, there should be no need to update your firmware. This information is just for your reference as it is often unnecessary to upload new firmware to your router. <b>More...</b>
Firmware Update	<b>Step 1:</b> Obtain an updated firmware image file from your ISP.				
Access Controls	<b>Step 2:</b> Enter the path to the image file location in the box below or click the "Browse" button to locate the image file.				
Diagnostics	<b>Step 3:</b> Click the "Update Firmware" button once to upload the new image file.				
System Log	NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot. Please DO NOT power off your router before the update is complete.				
Logout	<b>FIRMWARE UPDATE</b>				
	Current Firmware Version : AF_1.59_T10 Current Firmware Date : Oct 11 2011				
	Firmware File Name : <input type="text"/> <input type="button" value="Browse..."/>				
	<input type="button" value="Update Firmware"/>				

Select the correct firmware file, then click on ***Open***.

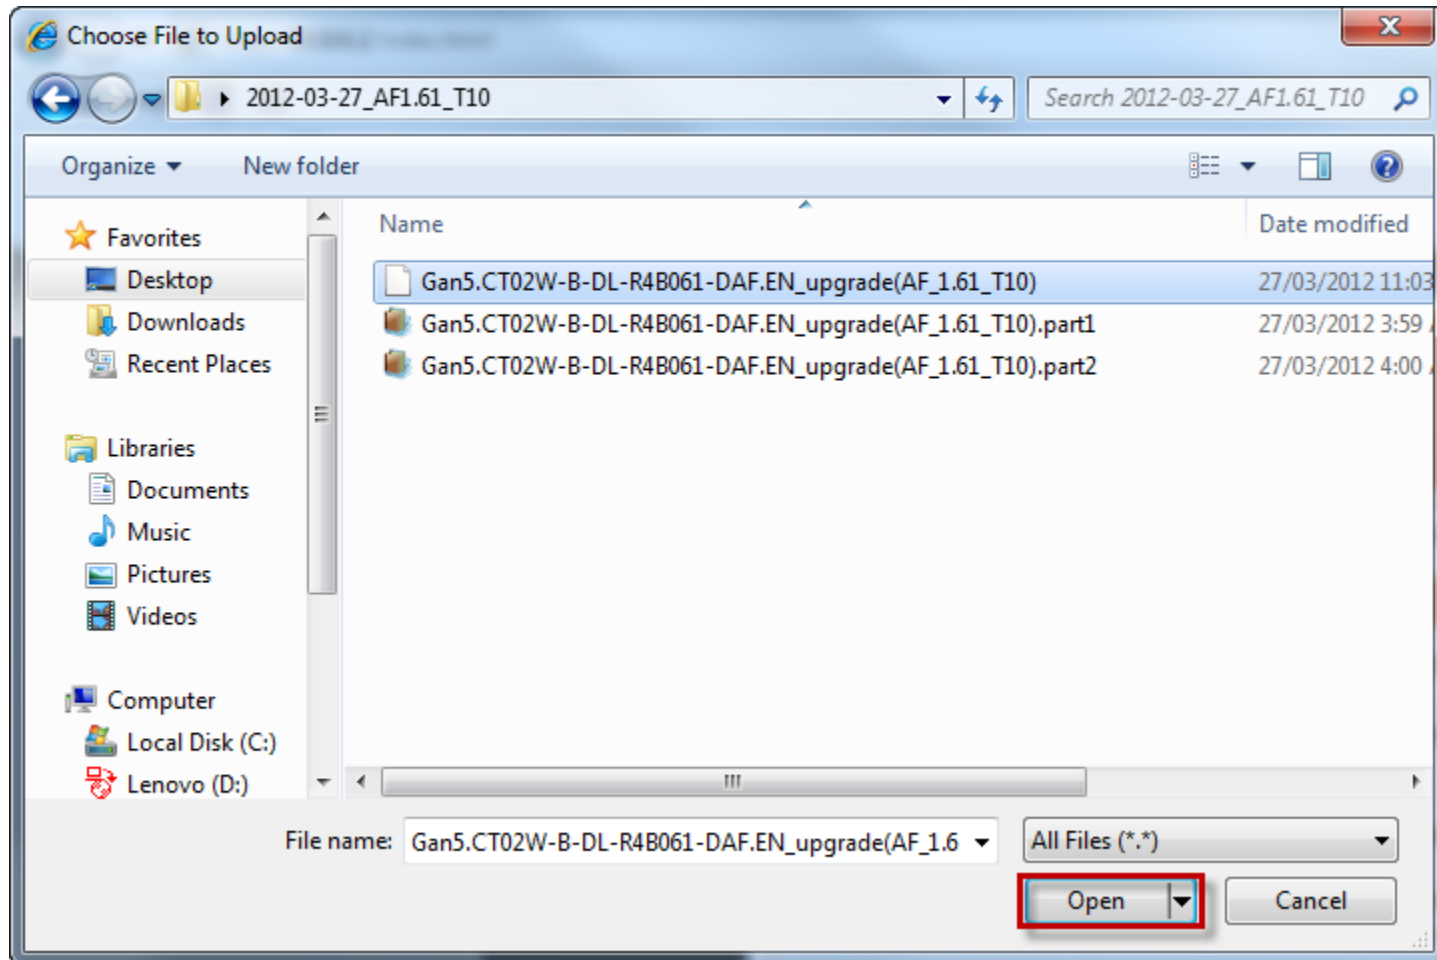

Select *Update Firmware*.

The screenshot shows the D-Link web interface for a DSL-2750U router. The top navigation bar includes 'DSL-2750U', 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The left sidebar lists 'System', 'Firmware Update', 'Access Controls', 'Diagnostics', 'System Log', and 'Logout'. The main content area is titled 'FIRMWARE UPDATE' and contains three steps: Step 1: Obtain an updated firmware image file from your ISP. Step 2: Enter the path to the image file location in the box below or click the "Browse" button to locate the image file. Step 3: Click the "Update Firmware" button once to upload the new image file. A note states: NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot. Please DO NOT power off your router before the update is complete. Below the steps, the current firmware version is AF\_1.59\_T10 and the current date is Oct 11 2011. A text input field for the firmware file name contains the path C:\Users\marilizet\Videos\Gan5.CT02W-B-DL-F, followed by a 'Browse...' button. At the bottom, the 'Update Firmware' button is highlighted with a red box.

**D-Link**

DSL-2750U // SETUP ADVANCED MAINTENANCE STATUS HELP

System  
Firmware Update  
Access Controls  
Diagnostics  
System Log  
Logout

**FIRMWARE UPDATE**

**Step 1:** Obtain an updated firmware image file from your ISP.

**Step 2:** Enter the path to the image file location in the box below or click the "Browse" button to locate the image file.

**Step 3:** Click the "Update Firmware" button once to upload the new image file.

NOTE: The update process takes about 2 minutes to complete, and your DSL Router will reboot. Please DO NOT power off your router before the update is complete.

**FIRMWARE UPDATE**

**Current Firmware Version :** AF\_1.59\_T10  
**Current Firmware Date :** Oct 11 2011

**Firmware File Name :** C:\Users\marilizet\Videos\Gan5.CT02W-B-DL-F

**Helpful Hints...**


**Please Note:** This page displays your device firmware version and information that will be helpful for D-Link technicians should you require any technical support. If your router is working without issue, there should be no need to update your firmware. This information is just for your reference as it is often unnecessary to upload new firmware to your router.

[More...](#)


Once you have selected **Update Firmware**, the DSL-2750U will automatically Reboot.

**DSL ROUTER UPDATE**

Uploading is in progress. The DSL Router will reboot upon completion. Please wait...

 19%

Message from webpage

 DSL Router has been rebooted and is up running now.

**OK**



Confirm that the firmware upload was successful by looking at the upper right hand corner of your Web GUI or by selecting **Status** and then **Device Info**.

Product Page: DSL-2750U [Site Map](#) Firmware Version: AF\_1.61\_T10 

**D-Link**

DSL-2750U // **SETUP** **ADVANCED** **MAINTENANCE** **STATUS** **HELP**

Device Info  
Wireless Clients  
DHCP Clients  
Logs  
Statistics  
Route Info  
Logout

**DEVICE INFO**

This information reflects the current status of your DSL connection.

**SYSTEM INFO**

Model Name:	DSL-2750U
Time and Date:	Mon Jul 18 00:06:51 2011
Firmware Version:	AF_1.61_T10

**Helpful Hints...**

This page displays a summary overview of your router status, including device software version, summary of your Internet configuration including wireless and Ethernet status.

[More...](#)



**Please ensure to Logout each time an Upgrade has been Completed! You can achieve this by selecting *Maintenance* and then *Logout*.**

The screenshot displays the D-Link web interface for a DSL-2750U device. The top navigation bar includes the D-Link logo and a menu with options: SETUP, ADVANCED, MAINTENANCE (highlighted with a red box), STATUS, and HELP. A left sidebar lists various system functions: System, Firmware Update, Access Controls, Diagnostics, System Log, and Logout (highlighted with a red box). The main content area, under the MAINTENANCE tab, features a sub-header 'LOGOUT' and a message: 'Logging out will close the browser.' Below this message is a 'Logout' button, also highlighted with a red box.