




### Setup Guide.

Type in the IP address 10.0.0.2 into your web-browser




You will be prompted with username & password

Username: admin (default)

Password: admin (lower-case)

Login

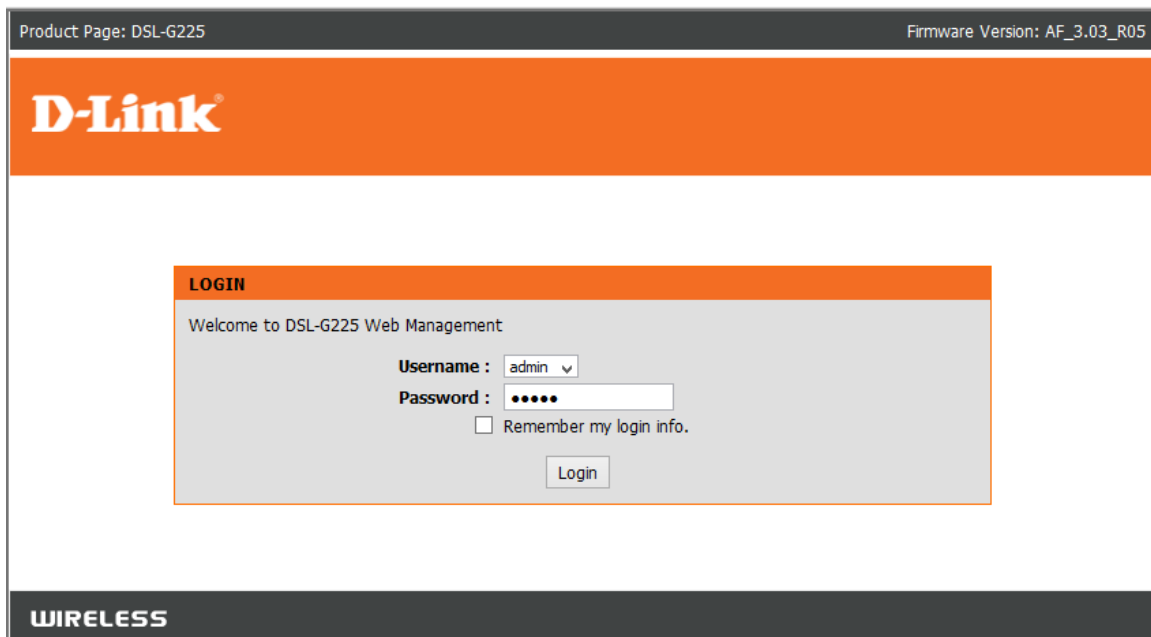

Click on “3G Internet Setup” then click on edit for the “ppp3g0”

Product Page: DSL-G225 Site Map Firmware Version: AF\_3.03\_R05

**D-Link**

DSL-G225 // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard  
xDSL Interface  
Layer2 Interface  
WAN Internet Setup  
**3G Internet Setup**  
Wireless Connection  
Local Network  
IPv6 Local Network  
Time and Date  
Print Server  
Logout

**3G MOBILE SETUP**

Choose Add, Remove or Edit to configure a WAN service For 3G Mobile interface.

**Note:** If user manually connect up the 3G connection by clicking the 'Manual Dial' button, it will always stay connected, even when DSL connection is back alive.

**WIDE AREA NETWORK (WAN) SERVICE FOR 3G MOBILE SETUP**

modem status: NO USB CARD

Interface	Description	Type	Edit	Action
ppp3g0	mobile	mobile	edit	Manual Dial

Add Remove Information Pin Manage Upload Driver

**Helpful Hints...**

When configuring the 3G router to access the Internet, be sure to choose the correct **Connection Type** from the list below.

Please take care when entering your **username** and **password** as these are case sensitive. The majority of connection issues are caused by incorrect **username** or **password** combinations.

Username & Password blank unless needed for 3G service from (Internet Service Provider)

APN: “TelkomInternet” (If Sim Card is linked to ADSL account) APN: “internet” for normal Sim Cards

Dial Number: “\*99#”

Default WAN Connection: 3G/Ethernet/DSL (Default Internet connection source)

Product Page: DSL-G225 Site Map Firmware Version: AF\_3.03\_R05

**D-Link**

DSL-G225 // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard  
xDSL Interface  
Layer2 Interface  
WAN Internet Setup  
**3G Internet Setup**  
Wireless Connection  
Local Network  
IPv6 Local Network  
Time and Date  
Print Server  
Logout

**3G USB MOBILE MODEM SETUP**

This screen allows you to configure a 3G wan interface.

**WIDE AREA NETWORK (WAN) SERVICE FOR 3G MOBILE SETUP**

Auto NDIS

User Name:

Password:

Authentication Method:

APN:

Dial Number:

Dial on demand

Dial Delay(in sec.):

Default WAN Connection Select:

WAN backup mechanism:  DSL  IP connectivity

Apply/Save Auto Setting

**Helpful Hints...**

When configuring the 3G router to access the Internet, be sure to choose the correct **Connection Type** from the list below.

Please take care when entering your **username** and **password** as these are case sensitive. The majority of connection issues are caused by incorrect **username** or **password** combinations.

Click

“Apply/Save”

Note:

NO USB CARD: (No Dongle Inserted / or the dongle is not supported)

Int: (Dialing to connect)

Switching: (Switching from current internet source to 3G)

If you experience any problems with the router please contact D-Link Technical Support:

Email: [support@d-link.co.za](mailto:support@d-link.co.za)

Telephone: 0127412000