




### Setup Guide.

Type in the IP address 10.0.0.2 into your web-browser




You will be prompted with username & password

Username: admin (default)

Password: admin (lower-case)

Login

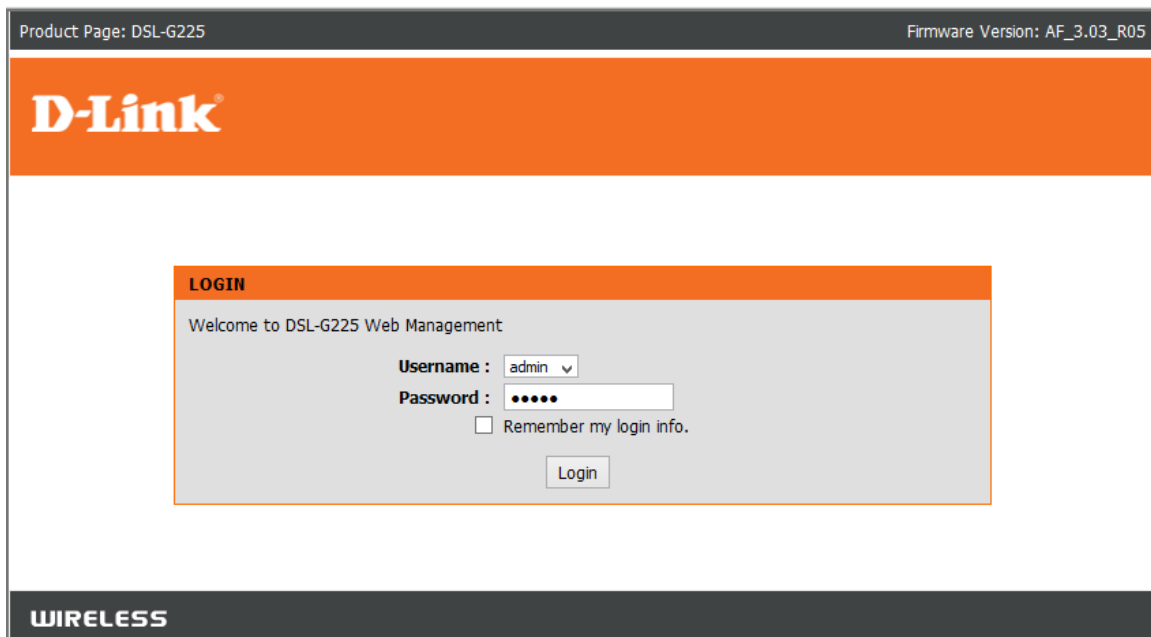

Click on “WAN Internet setup” and delete the following boxes that are ticked

DSL-G225 //

SETUP    ADVANCED    MAINTENANCE    STATUS

Wizard

xDSL Interface

Layer2 Interface

WAN Internet Setup

3G Internet Setup

Wireless Connection

Local Network

IPv6 Local Network

Time and Date

Print Server

Logout

### WIDE AREA NETWORK (WAN) SERVICE SETUP

Choose Add, Remove or Edit to configure a WAN service over a selected interface.

**Note:** Firstly, user need to add a layer 2 interface. Click [Setup-->Layer2 Interface](#) to redirect to layer 2 configure page.

### NETWORK INTERFACE CONFIGURATION

	Interface	Description	Type	vlan	Igmp	NAT	Firewall	IPv6	Mld
<input type="checkbox"/>	ppp0.1	ADSL_4_8_35	PPPoE	-1/-1	Disabled	Enabled	Enabled	Disabled	Disabled
<input checked="" type="checkbox"/>	ppp1.1	VDSL_4_1_1.835	PPPoE	0/835	Disabled	Enabled	Enabled	Disabled	Disabled
<input checked="" type="checkbox"/>	ppp2.1	ETH_WAN	PPPoE	-1/-1	Disabled	Enabled	Enabled	Disabled	Disabled

Add    Delete    Edit

Click on “Layer 2 Interface” Delete the following with tick boxes

DSL-G225 //

SETUP    ADVANCED    MAINTENANCE    STATUS

Wizard

xDSL Interface

Layer2 Interface

WAN Internet Setup

3G Internet Setup

Wireless Connection

Local Network

IPv6 Local Network

Time and Date

Print Server

Logout

### DSL ATM,DSL PTM,ETH INTERFACE CONFIGURATION

This screen allows you to configure an ATM PVC identifier (VPI and VCI) and select a service category,DSL PTM interfaces,ETH WAN interfaces

### L2 INTERFACE CONFIGURATION

	Interface	Conn Mode	Link Type	DSL Latency	Vpi/Vci	Category	IP QoS
<input type="checkbox"/>	atm0	VlanMuxMode	EoA	4	8/35	UBR	1
<input checked="" type="checkbox"/>	ptm0	VlanMuxMode		4			1
<input checked="" type="checkbox"/>	WAN	VlanMuxMode					

Add    Delete

Once you've deleted the connections, add a ETH connection and say "Apply/Save"

**SELECT INTERFACE TYPE**

ADSL  VDSL  ETH

**ETH WAN INTERFACE CONFIGURATION**

ETH port:

Go back to "WAN Internet Setup" and say add, and change the following

Layer 2 Interface to "WAN/WAN"

Protocol: PPP over Ethernet (PPPoE)

802.1P Priority: -1

802.1Q VLAN ID: -1

PPP Username & Password Provided by your Internet Service Provider

When finished doing that scroll to the bottom of the page and click next then apply.

**SELECT A LAYER 2 INTERFACE FOR THIS SERVICE**

Layer 2 interface:

**CONNECTION TYPE**

Protocol:

Enable multiple PPP connections over one VC/VLAN tag option available:

802.1P Priority [0-7]:

802.1Q VLAN ID [0-4094]:

**PPP USERNAME AND PASSWORD**

PPP Username:

PPP Password:

Confirm PPP Password:

If you experience any problems with the router please contact D-Link Technical Support:

Email: [support@d-link.co.za](mailto:support@d-link.co.za)

Telephone: 0127412000