


[Basic Manual Setup for G413X- Basic Wizard Setup for DHCP Fibre]

Before you start: Please make sure the router is connected as per the Quick Installation Guide (QIG) for Fibre service.

- 1) On a device that is connected to the router (preferably with a cable on a pc/laptop or Wi-Fi on a phone is fine but please make sure your mobile data is off).


Note: this config is best done with a LAN cable.

- 2) Open a web Browser (internet explorer/google chrome/Firefox) input the IP address of your router (default is 10.0.0.2 unless it was changed), we will use Microsoft Edge in this example.

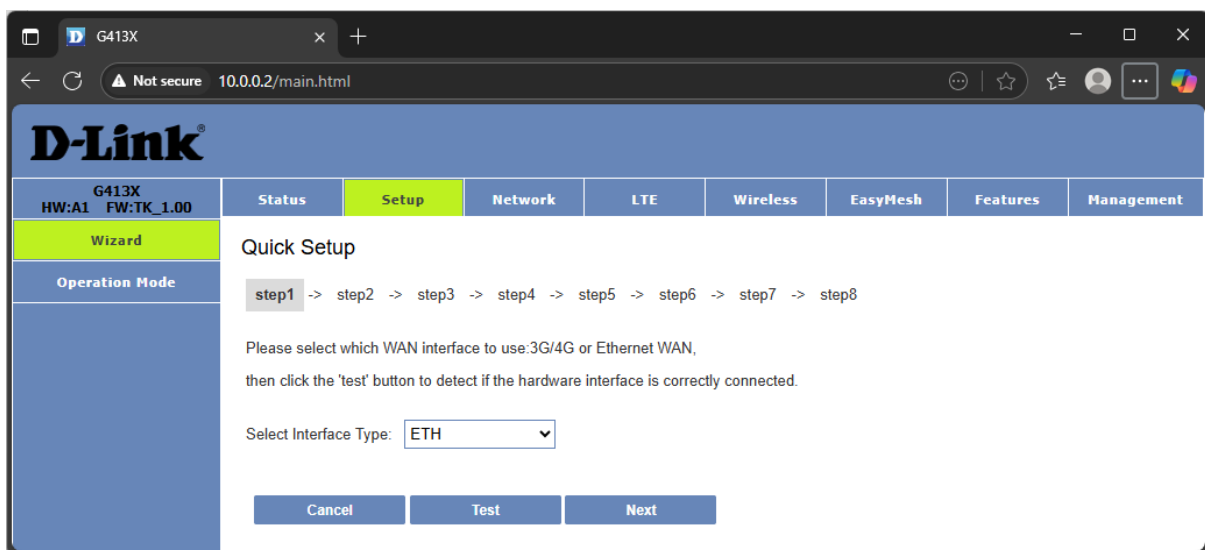


3) Click on [Test] as per the instructions.

Note: Make sure the interface type is selected to ETH

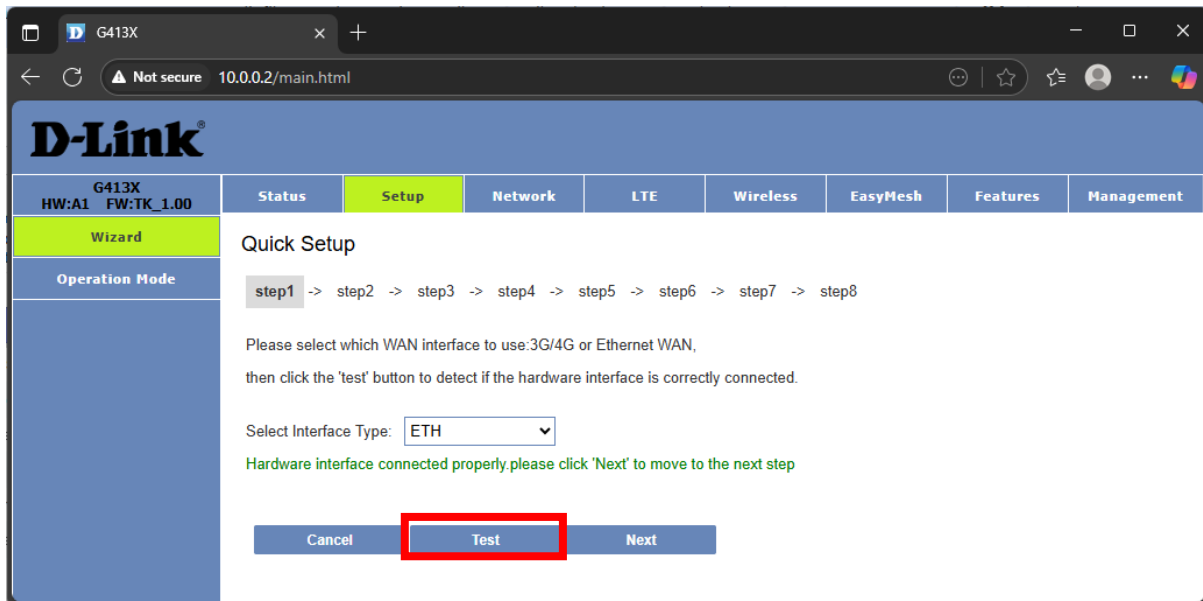

a. If it passes, it will show Hardware interface connect properly.

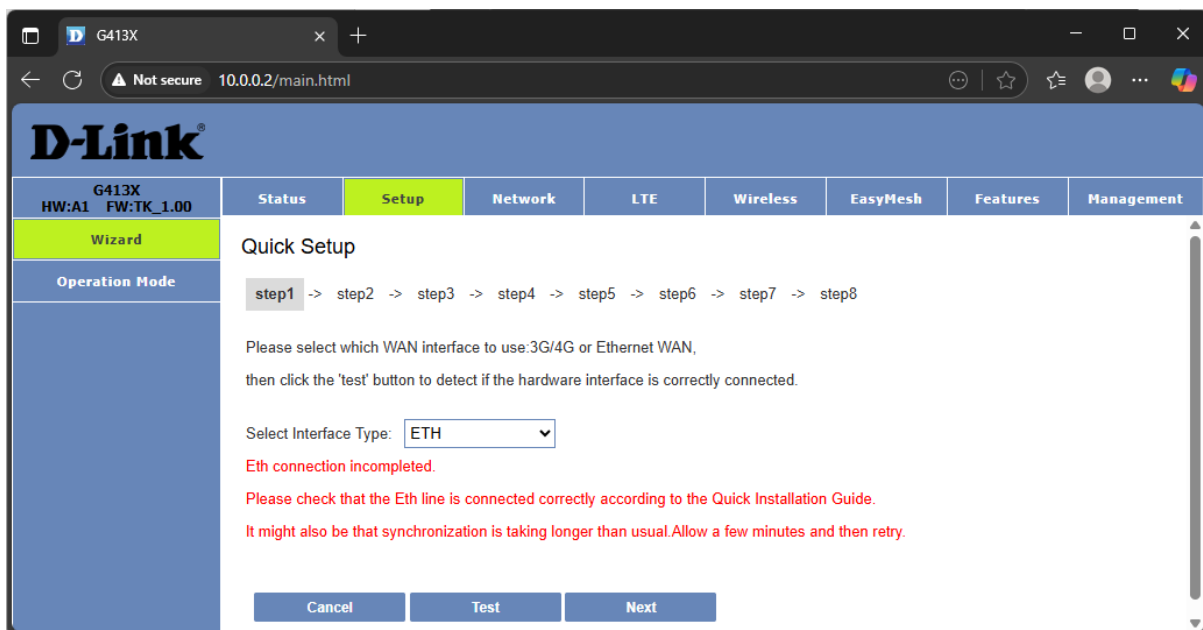

b. If it fails, it will show ETH connection incomplete, please check the cable is connected properly and try again

4) Click on [Next] as per the instructions

D-Link®

G413X
HW:A1 FW:TK_1.00

Status Setup Network LTE Wireless EasyMesh Features Management

Wizard

Operation Mode

Quick Setup

step1 -> step2 -> step3 -> step4 -> step5 -> step6 -> step7 -> step8

Please select which WAN interface to use: 3G/4G or Ethernet WAN,
then click the 'test' button to detect if the hardware interface is correctly connected.

Select Interface Type:

Hardware interface connected properly, please click 'Next' to move to the next step

Cancel Test Next

5) System will Auto detect, please select the one that passed and click on [Next]

D-Link®

G413X
HW:A1 FW:TK_1.00

Status Setup Network LTE Wireless EasyMesh Features Management

Wizard

Operation Mode

Quick Setup

step1 -> step2 -> step3 -> step4 -> step5

Auto detect success, DHCP test passed! Suggest you choose DHCP. Please click 'Next'.

PPP account test fail! If you still want to test PPP account, Please click the Reset button to reset to factory defaults, and then restart this wizard after the reset.

Select Mode:

Back Reset Next

- a. If both DHCP and PPPoE test failed, it means that your FIBRE service is not activated. Please contact the provider of your FIBRE to activate it.

- 6) Update your 2.4G and 5.8G Wi-Fi name and password.
 - a. SSID is the Wi-Fi name that you will connect to
 - b. WPA Pre-share key is the Wi-Fi password of the corresponding Wi-Fi

D-Link®

G413X HW:A1 FW:TK_1.00

Status Setup Network LTE Wireless EasyMesh Features Management

Wizard

Operation Mode

Quick Setup

step1 -> step2 -> **step3** -> step4 -> step5

SSID 2.4GHz:

2.4G WPA Preshare key:

SSID 5GHz:

5G WPA Preshare key:

Back Skip Next

←Wi-Fi Password you like

←Wi-Fi Password you like

- 7) Change the login password that you will use next time you try to access the router's interface.

D-Link®

G413X HW:A1 FW:TK_1.00

Status Setup Network LTE Wireless EasyMesh Features Management

Wizard

Operation Mode

Quick Setup

step1 -> step2 -> step3 -> **step4** -> step5

Use the fields below to enter up to 15 characters and click "Apply" to change or create passwords.

Note: Password cannot contain a space.

AdminName:

AdminPassword:

Confirm AdminPassword:

Back Skip Next

←Login Password you like

←Same Password again

- 8) This is the summary page that will show you all the settings that will be changed. Please take a photo or screen shot for future reference and click on [Apply]

