




Setup Guide.

Type in the IP address 10.0.0.2 into your web-browser




You will be prompted with username & password

Username: admin (default)

Password: admin (lower-case)

Login

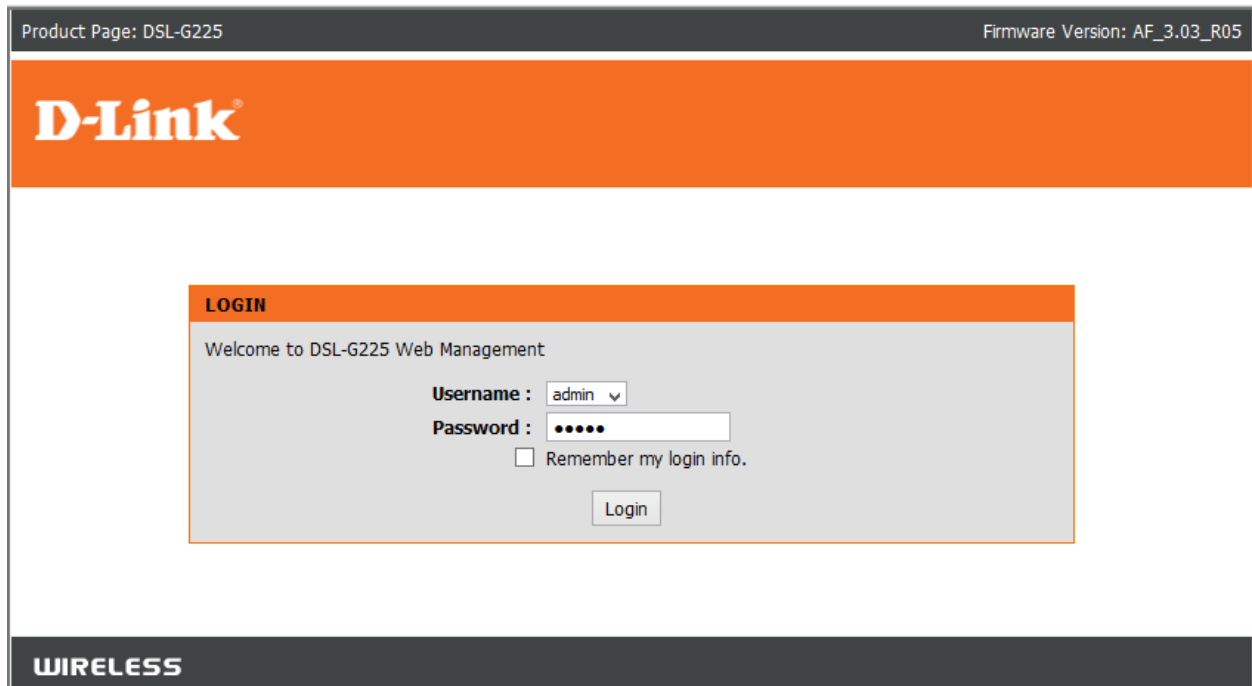

Click on "WAN Internet Setup", then the first option "ppp0.1" then click edit.

Product Page: DSL-G225 Site Map Firmware Version: AF_3.03_R05

D-Link

DSL-G225 // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard
xDSL Interface
Layer2 Interface
WAN Internet Setup
3G Internet Setup
Wireless Connection
Local Network
IPv6 Local Network
Time and Date
Print Server
Logout

WIDE AREA NETWORK (WAN) SERVICE SETUP

Choose Add, Remove or Edit to configure a WAN service over a selected interface.

Note: Firstly, user need to add a layer 2 Interface. Click [Setup-->Layer2 Interface](#) to redirect to layer 2 configure page.

NETWORK INTERFACE CONFIGURATION

Interface	Description	Type	vlan	Icmp	NAT	Firewall	IPv6	Mld	
<input checked="" type="checkbox"/>	ppp0.1	ADSL_4_8_35	PPPoE	-1/-1	Disabled	Enabled	Enabled	Disabled	Disabled
<input type="checkbox"/>	ppp1.1	VDSL_4_1_1.835	PPPoE	0/835	Disabled	Enabled	Enabled	Disabled	Disabled
<input type="checkbox"/>	ppp2.1	ETH_WAN	PPPoE	-1/-1	Disabled	Enabled	Enabled	Disabled	Disabled

Helpful Hints...

When configuring the router to access the Internet, be sure to choose the correct **Connection Type** from the list below.

Please take care when entering your **username** and **password** as these are case sensitive. The majority of connection issues are caused by incorrect **username** or **password** combinations.

[More...](#)

Fill in the PPP Username & PPP Password that has been provided by your Internet service provider, scroll to the bottom of the page click next and then apply.

Note: Make sure the password is typed correctly since it is (Case Sensitive)

Product Page: DSL-G225 Site Map Firmware Version: AF_3.03_R05

D-Link

DSL-G225 // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard
xDSL Interface
Layer2 Interface
WAN Internet Setup
3G Internet Setup
Wireless Connection
Local Network
IPv6 Local Network
Time and Date
Print Server
Logout

WAN SERVICE INTERFACE CONFIGURATION

This screen allows you to configure a WAN Service Interface, setup Internet connection

SELECT A LAYER 2 INTERFACE FOR THIS SERVICE

Layer 2 interface: atm0/(4_8_35) v

CONNECTION TYPE

Protocol: PPP over Ethernet (PPPoE) v

Enable multiple PPP connections over one VC/VLAN tag option available:

802.1P Priority [0-7]: -1

802.1Q VLAN ID [0-4094]: -1

PPP USERNAME AND PASSWORD

PPP Username: guest@telkomadsl

PPP Password: [masked]

Confirm PPP Password: [masked]

Helpful Hints...

When configuring the router to access the Internet, be sure to choose the correct **Connection Type** from the list below.

Please take care when entering your **username** and **password** as these are case sensitive. The majority of connection issues are caused by incorrect **username** or **password** combinations.

[More...](#)

If you experience any problems with the router please contact D-Link Technical Support:

Email: support@d-link.co.za

Telephone: 0127412000