

## **KVM-440H**

The HDMI KVM switch support a set of keyboard, mouse and monitor to control 4/8 computers. And also support USB Hub. High definition support, 4k\*2k@30Hz resolution provide. You can switch this KVM switch over hot-key and push button. Hot-key mean you can switch via the keyboard corresponding key.

## **Features**

- Support 8 HDMI computers input, 1 HDMI output
- With USB HUB interface support any USB2.0 devices
- Support Hot-swapping, no need to shut down KVM switch or computer, can plug in or out device that connected
- The resolution up to 4Kx2K@30Hz
- Switching method: hot-key and button.
- Must connect power adapter DC12V








Product Specifications				
Computer Connections	8			
Port Selection	Hotkeys, push buttons			
Connectors	Console Ports	Keyboard/ Mouse		4 x USB Type A Female
		Video		1 x HDMI Female
	KVM Ports	Keyboard/ Mouse		8 x USB Type B
		Video		8 x HDMI Female
LEDs	Selected		8	
Emulation	Keyboard/Mouse		USB	
Video	4K*2K @ 30Hz			
Scan Interval	8 seconds default			
Physical properties	Housing Weight		Metal	
			4.5 kg	
Carton Lot	4pcs			
Package Contents	1*User Manual, 4/ 8 *KVM cable			

## **Connection diagram:**

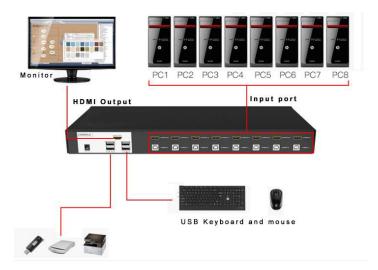

## **Packing list:**

- 1x 8 port HDMI KVM switch
- 1x Power adapter
- 1x User manual
- 4x 1.5m HDMI KVM cables
- 4x 1.8m HDMI KVM cables