


Telkom


Setting up your DWR-730 modem

Step 1: Open it up

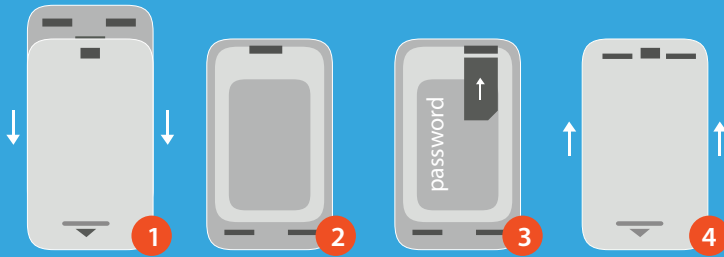


1. Slide the battery cover down.
2. Remove the battery.
3. Slot in the SIM card and record the password on the label.
4. Reattach the battery and cover.

Step 2: Turn it on

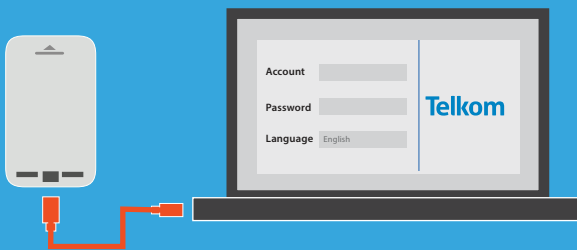


1. Switch on the device.
2. Connect the modem to a PC using the USB cable.
3. Open a web browser and enter 192.168.0.1 to log on.
 - a. Username: admin
 - b. Password: (leave the field blank)

Step 3: Interface

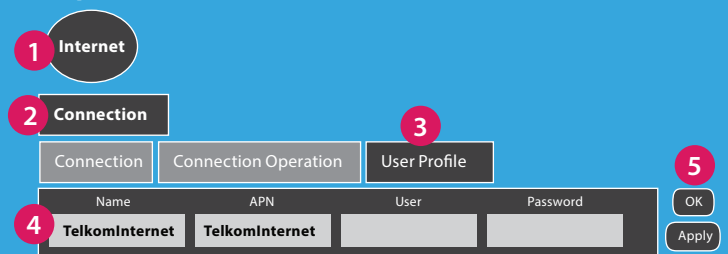


1. Select the **Internet** tab.
2. Select the **Connection** Menu.
3. Select the **User Profile** tab and click **Add**.
4. Enter **TelkomInternet** as the Name and APN (Username & Password field should be left blank)
5. Click **OK** and then **Apply**.

Step 4: Configure

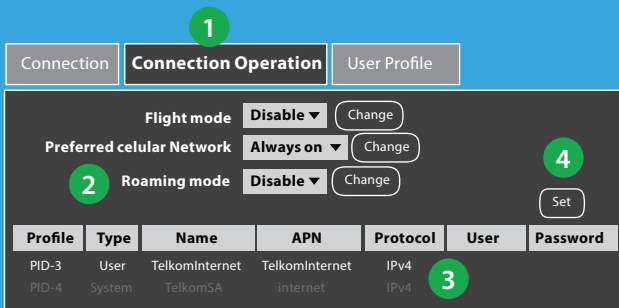

1. Select **Connection Operation** Tab.
2. Under **Roaming mode**, Select **Disable** and click **Change**.
3. Highlight the **TelkomInternet** profile.
4. Click **Set** to apply the new **TelkomInternet** profile.

Step 5: Resetting

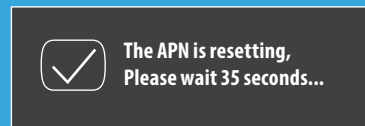

Your device will now use TelkomInternet as its default dialling profile.

Step 6: Go Wireless



1. Go to the **Wireless Network Connection** tab on your computer.
2. Select **DWR-730_xxxx** and enter the label password.
3. Enjoy browsing.